



Fastener
Solutions

11" Ladder Cable Ties Marketing Specifications

For the following part numbers:

08471-0

08473-0

08477-0

08479-0


August 1, 2018

AVERY DENNISON MARKETING SPECIFICATION

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

HISTORY

REV.	DATE	DESCRIPTION
L	10.29.14	REDRAWN IN NEW FORMAT, ADDED UL INFORMATION AND LOGO

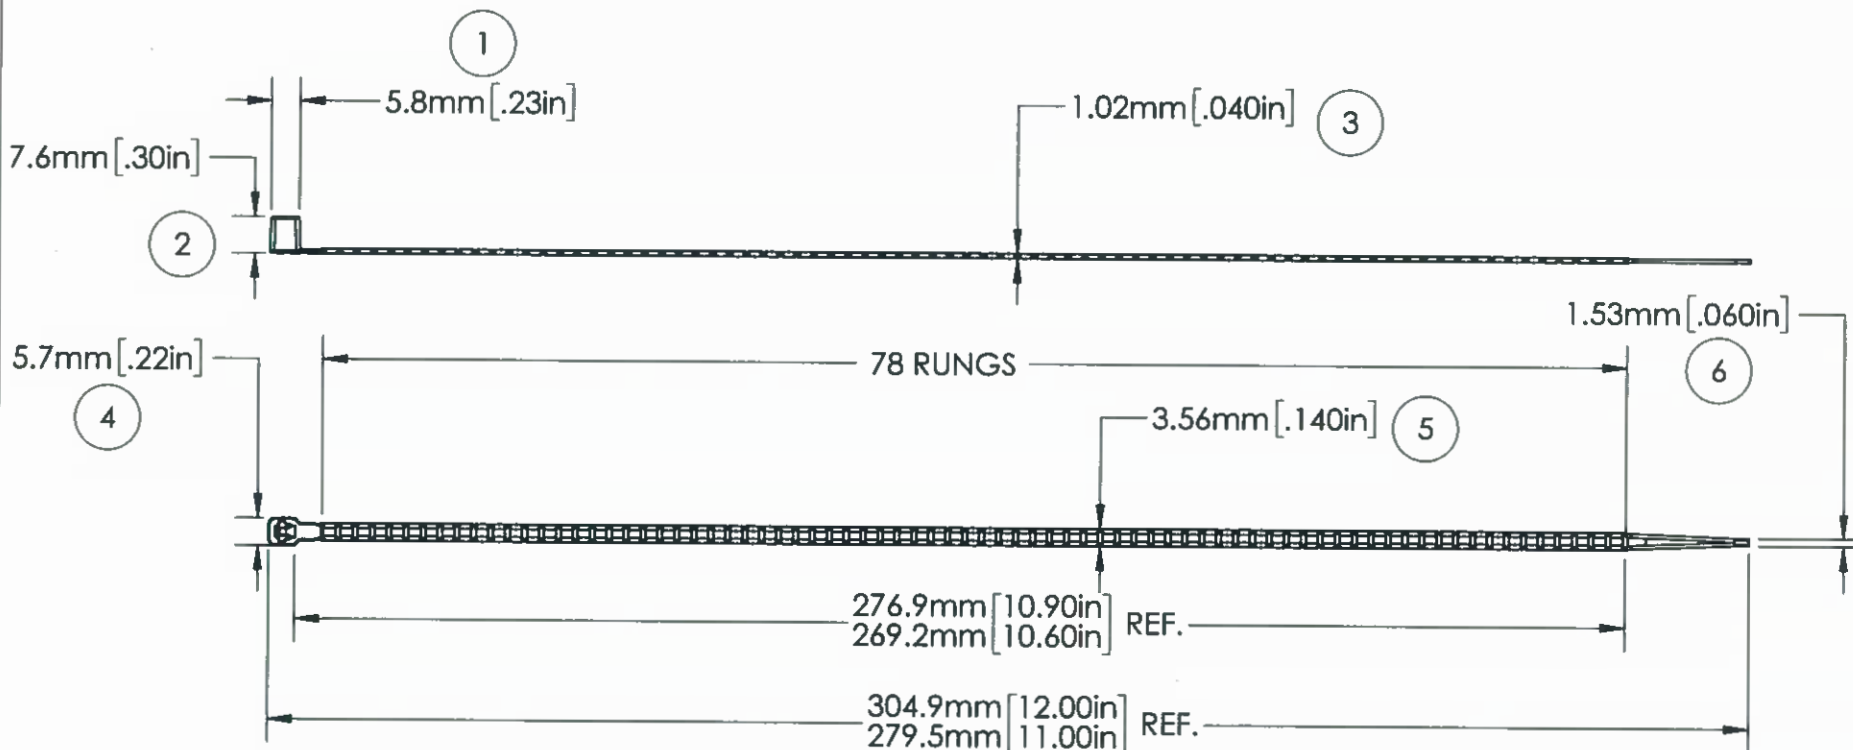

NOTE: THESE CABLE TIES ARE PLENUM RATED
AND HAVE A FLAMMABILITY RATING OF V-2



LISTED
POSITIONING DEVICE
E57800
TYPE 21

LOOP TENSILE STRENGTH:		40 LBF/180 N MIN. PER AS-23190		<u>APPROVALS:</u> ENG. APPR. <i>MOL d 7/26/2017</i> Q.A. APPR. <i>LBayer 7/26/2017</i>		 AVERY DENNISON FASTENER DIVISION FITCHBURG, MA 01420 U.S.A. TEL. 1-800-225-5913 FAX. 978-353-8157			
OPERATING TEMP RANGE:		-40°F (-40°C) TO 185°F (85°C)							
MIN. INSTALLATION TEMP:		32°F (0°C)		<u>SPECIFIED TOLERANCES ARE:</u> XX ± .03 INCHES X ± .7 MM XXX ± .010 INCHES XX ± .25 MM ANGULAR: ± 2°		MATERIAL NYLON 6/6 COLOR NATURAL		DESCRIPTION 11" CABLE TIE, LADDER STOCK NO. 08471-0 REV. L	
WEIGHT:		0.72 g. / (0.02448 oz.)							
BUNDLE DIAMETER:		Ø 1.6mm TO Ø 76.2mm(0.06" -3.0")							
TOOL:		12001-0 - HAND TOOL 12500-0 - PNEUMATIC TOOL							
PACKAGING:		1000/BAG, 5000/CASE							


FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL: 1-800-225-5913
FAX: 978-353-8157

AVERY DENNISON MARKETING SPECIFICATION

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

HISTORY

REV.	DATE	DESCRIPTION
M	10.29.14	REDRAWN IN NEW FORMAT, ADDED UL INFORMATION AND LOGO
N	03.28.18	ADDED SPECIAL CHARS, 6 AND 7

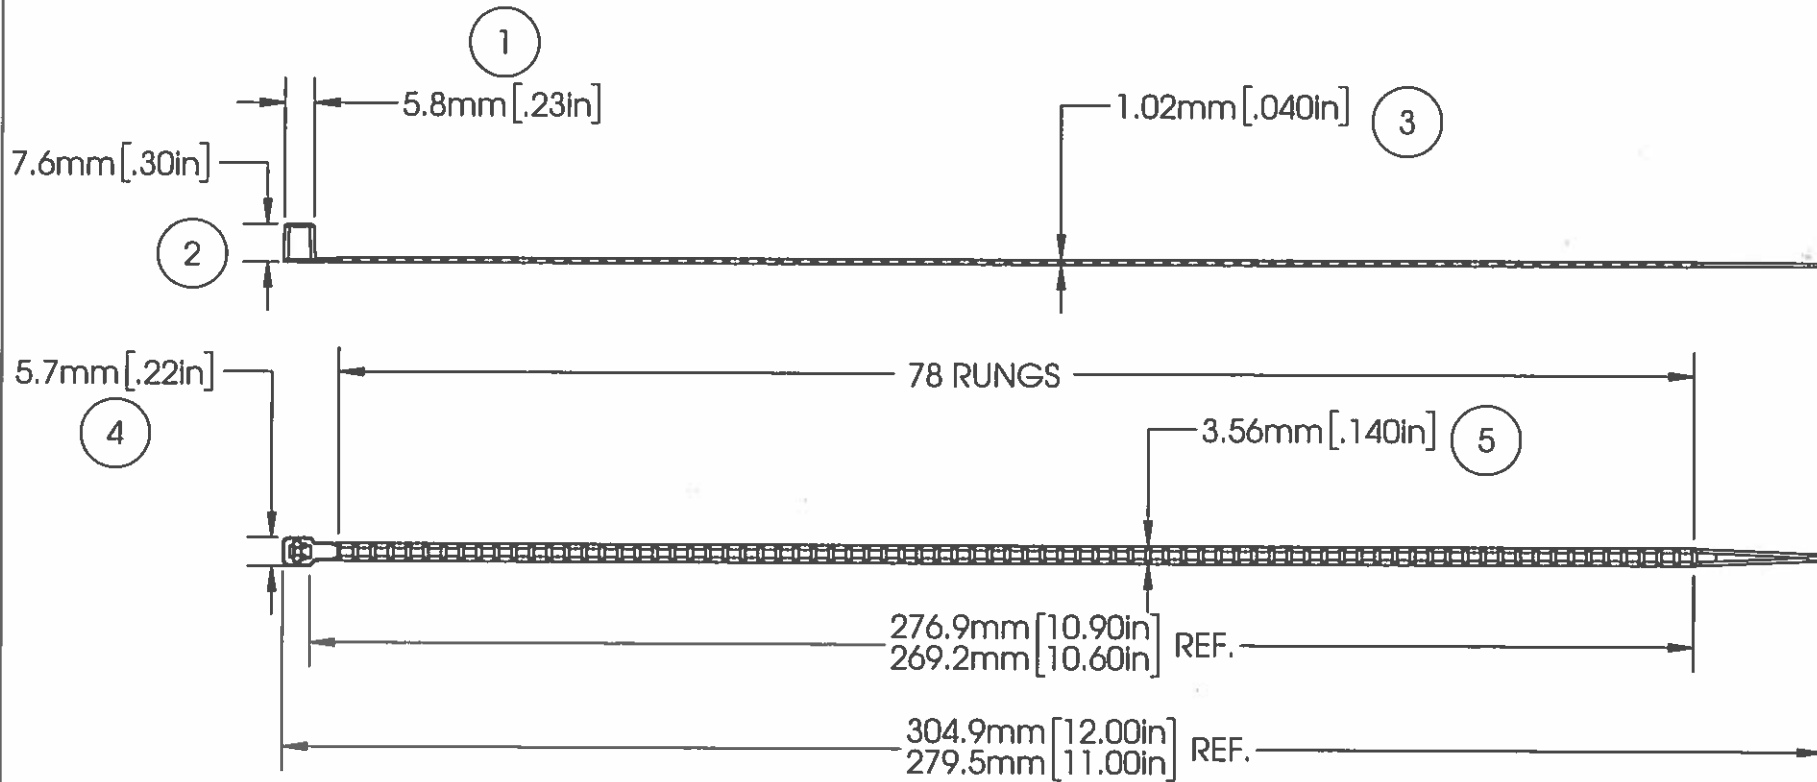

POSITIONING DEVICE
E57800
TYPE 21

6	Δ TENSILE STRENGTH:	40 LBF/180 N MIN. PER AS-23190
7	Δ FLAMMABILITY:	HB RATED PER FMVSS302
OPERATING TEMP RANGE:		-40°F (-40°C) TO 221°F (105°C)
MIN. INSTALLATION TEMP:		32°F (0°C)
WEIGHT:		0.72 g. / (0.02448 oz.)
BUNDLE DIAMETER:		Ø 1.6mm TO Ø 76.2mm (0.6" -3.0")
TOOL:		12001-0 - HAND TOOL 12500-0 - PNEUMATIC TOOL
PACKAGING:		1000/BAG, 5000/CASE

NOTES:
1. Δ = SPECIAL CHARACTERISTICS

APPROVALS:	ENG. APPR.	<i>[Signature]</i> 03.28.18
	Q.A. APPR.	<i>Caitlin Vaillancourt</i> 3-29-18

SPECIFIED TOLERANCES ARE:
XX ± .03 INCHES .X ± .7 MM
XXX ± .010 INCHES .XX ± .25 MM
ANGULAR: ± 2°

MATERIAL
NYLON 6/6, HEAT STABILIZED
COLOR
BLACK



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157


DESCRIPTION
11" CABLE TIE, LADDER
STOCK NO.
08473-0
REV.
N

AVERY DENNISON MARKETING SPECIFICATION

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

HISTORY

REV.	DATE	DESCRIPTION
L	10.29.14	REDRAWN IN NEW FORMAT, ADDED UL INFORMATION AND LOGO

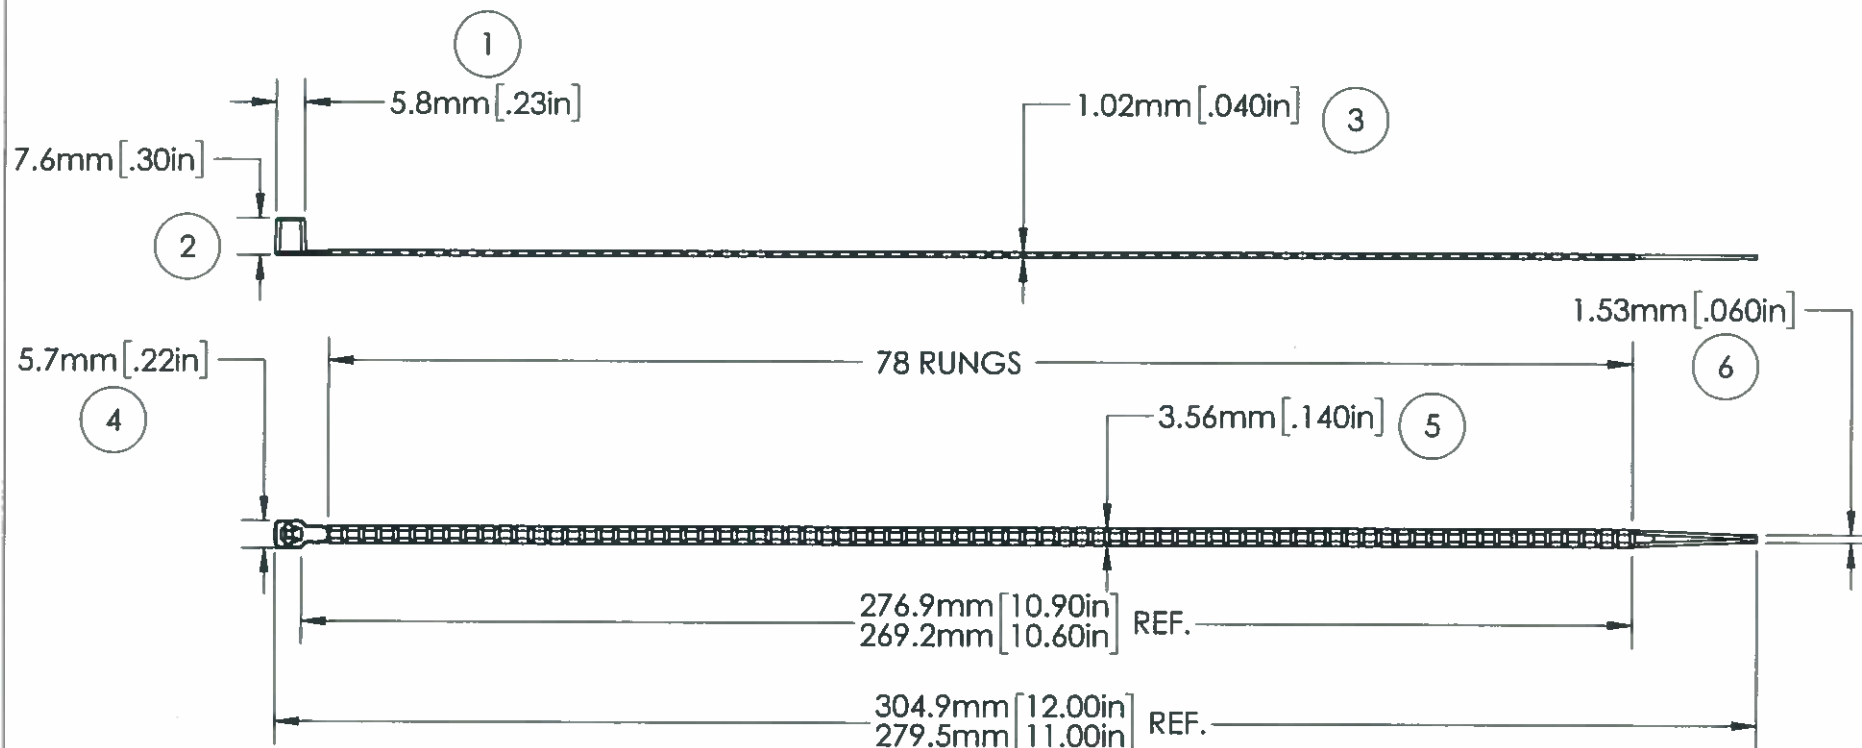

NOTE: THESE CABLE TIES ARE PLENUM RATED
AND HAVE A FLAMMABILITY RATING OF V-2



LISTED

POSITIONING DEVICE
E57800
TYPE 21

LOOP TENSILE STRENGTH:	40 LBF/180 N MIN. PER AS-23190
OPERATING TEMP RANGE:	-40°F (-40°C) TO 185°F (85°C)
MIN. INSTALLATION TEMP:	32°F (0°C)
WEIGHT:	0.72 g. / (0.02448 oz.)
BUNDLE DIAMETER:	Ø 1.6mm TO Ø 76.2mm (0.06" - 3.0")
TOOL:	12001-0 - HAND TOOL 12500-0 - PNEUMATIC TOOL
PACKAGING:	100/BAG, 5000/CASE

APPROVALS:

ENG. APPR. *mill d* 7/26/2017
Q.A. APPR. *J. Boyle* 7/24/2017

SPECIFIED TOLERANCES ARE:

.XX ± .03 INCHES .X ± .7 MM
.XXX ± .010 INCHES .XX ± .25 MM
ANGULAR: ± 2°

MATERIAL

NYLON 6/6

COLOR

NATURAL



AVERY DENNISON

FASTENER DIVISION
FRITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

DESCRIPTION

11" CABLE TIE, LADDER

STOCK NO.

08477-0

REV.


L

AVERY DENNISON MARKETING SPECIFICATION

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

HISTORY

REV.	DATE	DESCRIPTION
L	10.29.14	REDRAWN IN NEW FORMAT, ADDED UL INFORMATION AND LOGO

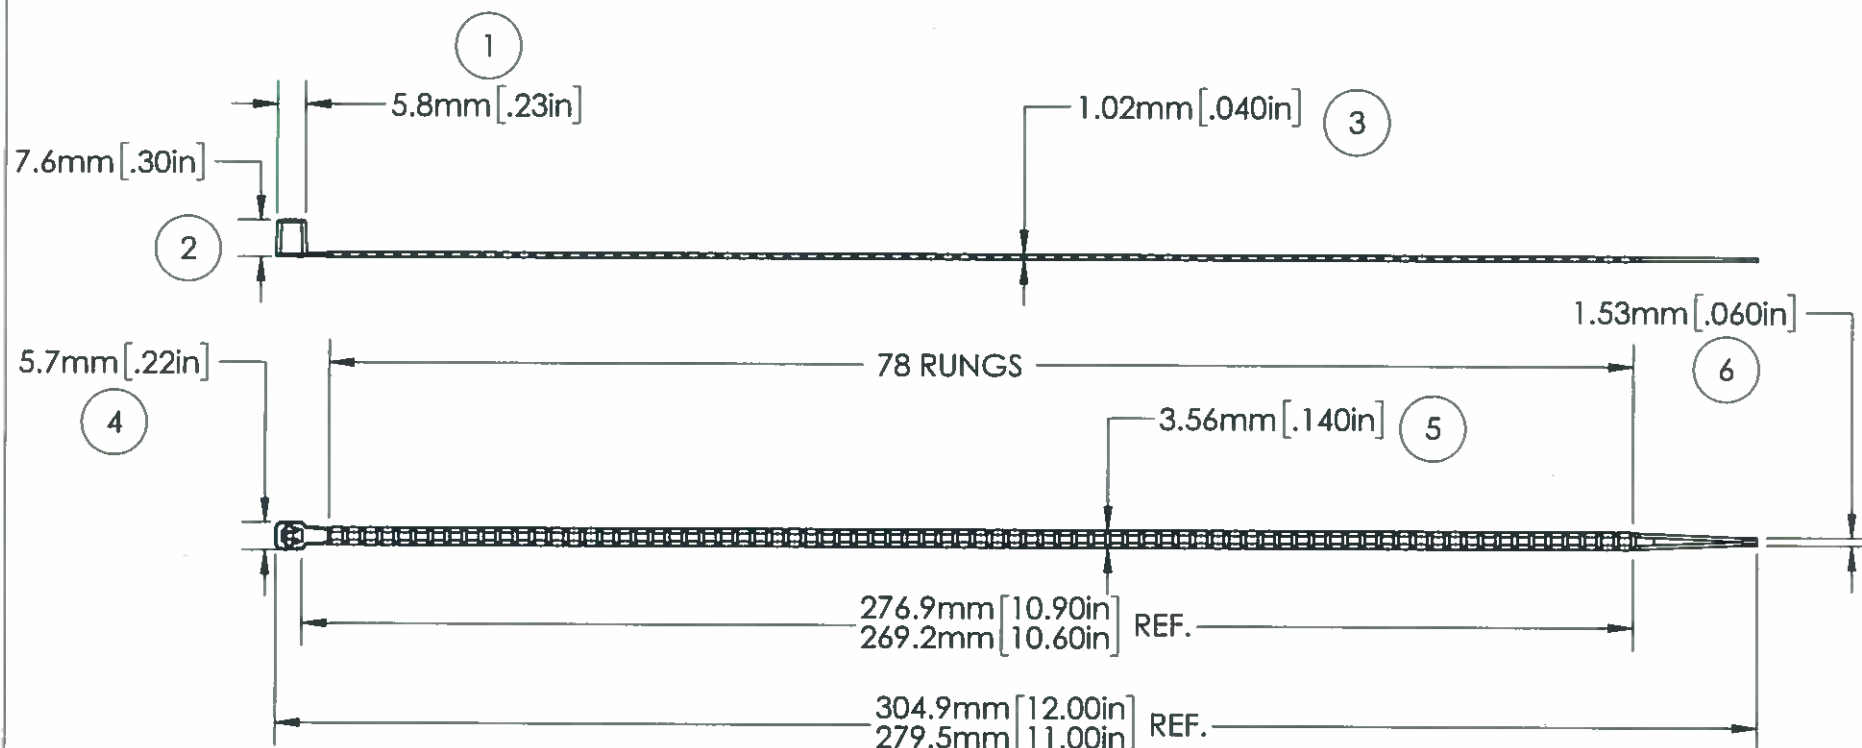

NOTE: THESE CABLE TIES ARE PLENUM RATED
AND HAVE A FLAMMABILITY RATING OF V-2



LISTED

POSITIONING DEVICE
E57800
TYPE 21

LOOP TENSILE STRENGTH:	40 LBF/180 N MIN. PER AS-23190	APPROVALS:	ENG. APPR.	MATERIAL	DESCRIPTION	STOCK NO.	REV.
OPERATING TEMP RANGE:	-40°F (-40°C) TO 221°F (105°C)		Q.A. APPR.				
MIN. INSTALLATION TEMP:	32°F (0°C)	SPECIFIED TOLERANCES ARE:		COLOR			
WEIGHT:	0.72 g. / (0.02448 oz.)						
BUNDLE DIAMETER:	Ø 1.6mm TO Ø 76.2mm (0.06"- 3.0")			BLACK			
TOOL:	12001-0 - HAND TOOL 12500-0 - PNEUMATIC TOOL						
PACKAGING:	100/BAG, 5000/CASE						



AVERY DENNISON

FASTENER DIVISION
FRITCHBURG, MA 01420 U.S.A.
TEL: 1-800-225-5913
FAX: 978-353-8157

11" CABLE TIE, LADDER

08479-0

L