


AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. = .030 IN.

MM = 0.7 mm
NOT TO SCALE

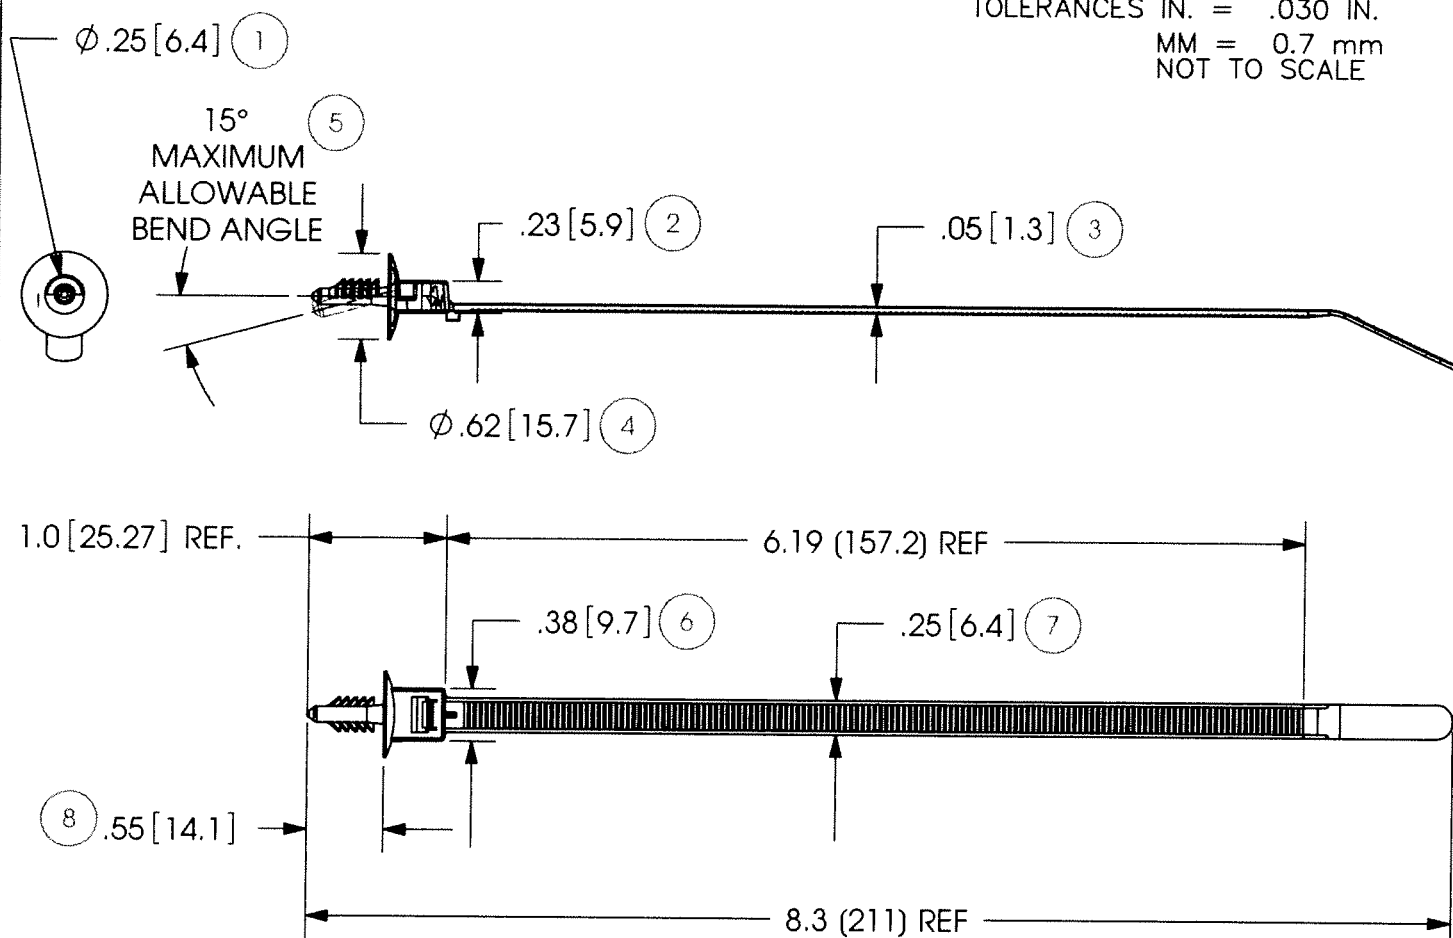

TENSILE STRENGTH: (LOOPED)	50 LBSF. / 22.7 KGF. MINIMUM PER MIL-S-23190.
OPERATING TEMP. RANGE:	-40°F (-40°C) TO 239°F (115°C) CONTINUOUS AND 257°F (125°C) AT MAXIMUM EXPOSURE
MATERIAL:	IMPACT MODIFIED NYLON 6/6 PER ASTM D4066 - HEAT STABILIZED, GRAY
WEIGHT:	2.05 GRAMS/EACH
BUNDLE DIAMETER:	1/16" - 1-3/4"
MOUNTING:	6MM THREADED HOLE
APPLICATION TOOL:	12001 - HAND INSTALLATION TOOL 12500 - PNEUMATIC INSTALLATION TOOL
TOOL TENSION SETTING:	6-8
PACKAGED IN:	500/BAG, 10 BAGS/MASTER



**AVERY
DENNISON**

FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

1/2 FLUTE FIR TREE - GRAY
FOR M6 THREADED HOLES

APPROVALS:

[Signature] 2/14/2011
[Signature] 2/14/11

STOCK NO.

20079

REV.

D