



Fastener
Solutions

7.5" Screw Mount Cable Ties Marketing Specifications

For the following part numbers:

08318-0
08415-0
08443-0
08444-0
08484-0

February 20, 2019

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.



NOTE: THESE CABLE TIES ARE UV RESISTANT AND HAVE A FLAMMABILITY RATING OF V-2

APPROVALS:	ENG. APPR.	<i>[Signature]</i> 11/19/14
	Q.A. APPR.	<i>[Signature]</i> 11/19/14

MATERIAL	NYLON 6/6, WEATHER RESISTANT
COLOR	BLACK

**AVERY
DENNISON**

FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL 1-800-225-5913
FAX 978-353-8157

STOCK NO.	08318-0	REV.	B
-----------	---------	------	---


REV.
B

AVERY DENNISON MARKETING SPECIFICATION

HISTORY

REV.	DATE	DESCRIPTION
L	06.28.18	ADDED SPECIAL CHARACTERISTICS; DIM 11 WAS MADE REF. DIM 12 CHANGED TO 11
M	02.06.19	ADDED UL RECOGNIZED LOGO

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

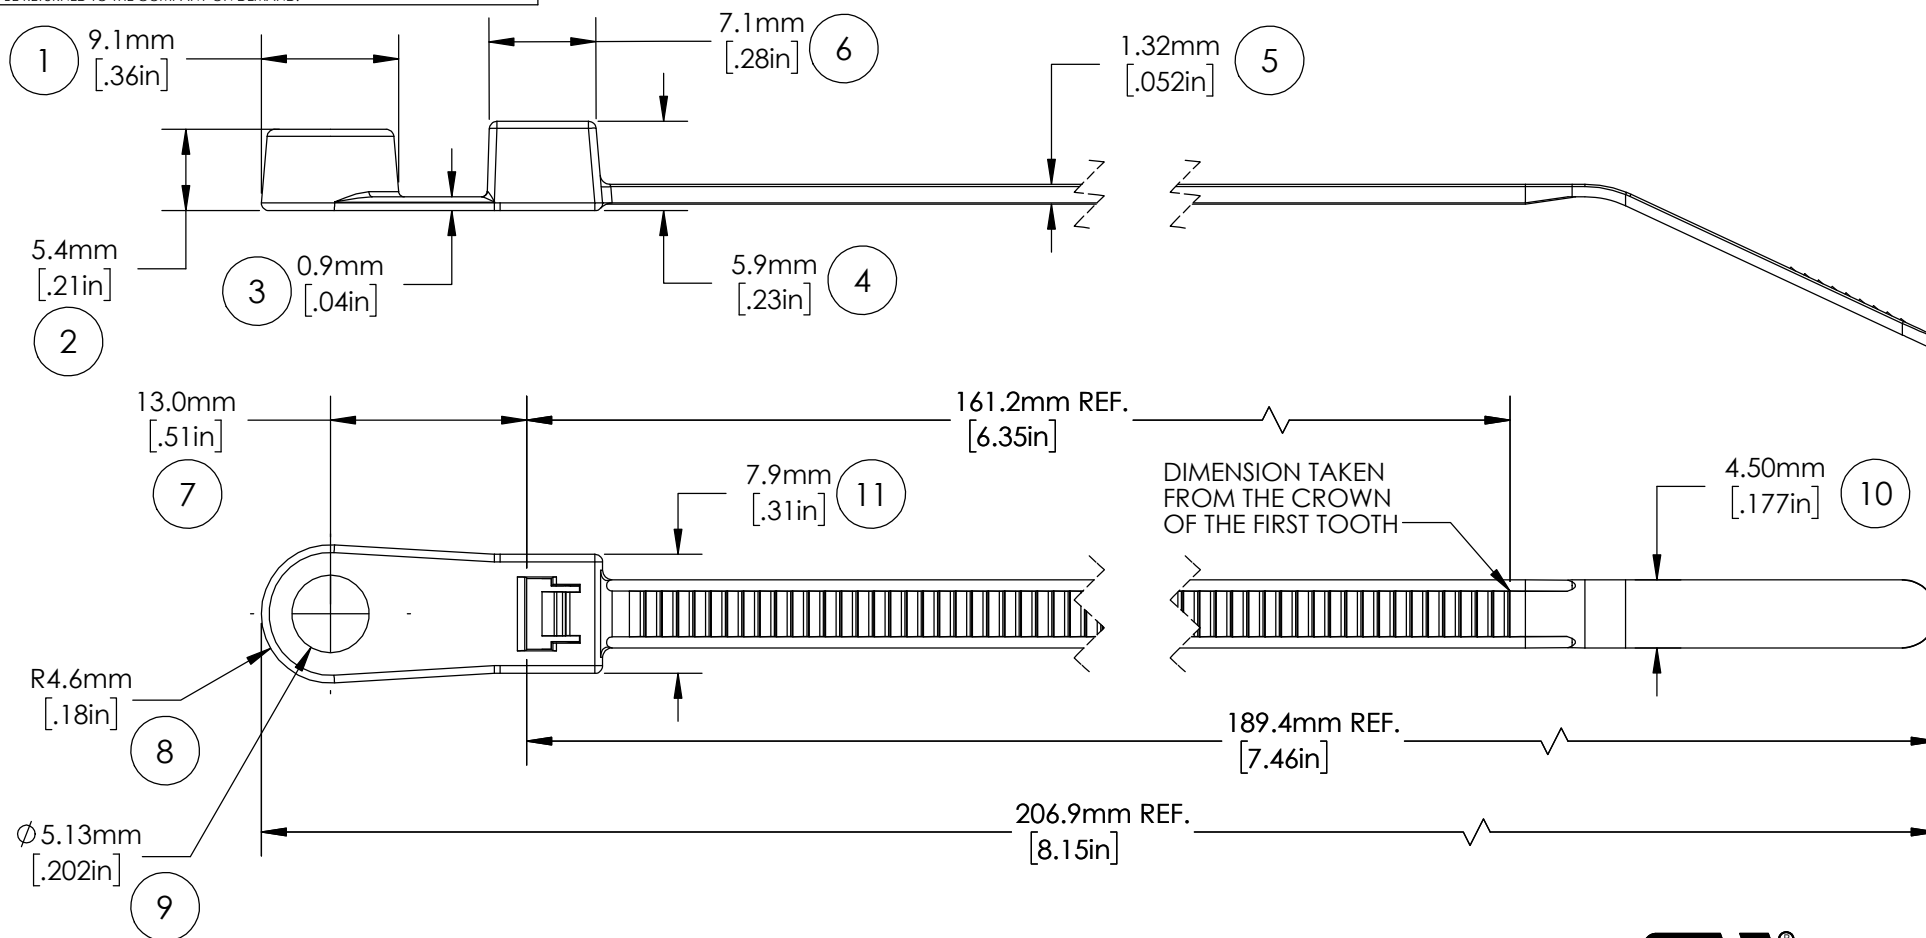

NOTES:

1. SPECIAL CHARACTERISTICS ARE NOTED BY A TRIANGLE (△)



E57800
TYPE 11

△	TENSILE STRENGTH:	50 LBF / 220N MIN. PER AS-23190
△	FLAMMABILITY RATING:	HB RATED PER FMVSS302
	MOUNTING:	#10 SCREW
	OPERATING TEMP:	-40°F (-40°C) TO 185°F (85°C)
	MIN. INSTALLATION TEMP.:	32°F (0°C)
	WEIGHT:	1.5g/0.05 OZ.
	BUNDLE DIAMETER:	Ø1.6mm [.06in] - Ø44.5mm [1.75in]
	INSTALLATION TOOL:	12001 - HAND TOOL 12500 - PNEUMATIC TOOL
	TOOL TENSION SETTING:	6 - 8
	PACKAGING:	1000/BAG, 5000/CASE

APPROVALS:	ENG. APPR. <i>Daniel Gilbertson</i>	02.06.19
	Q.A. APPR. <i>Caitlin Vaillancourt</i>	02.06.19
SPECIFIED TOLERANCES		MATERIAL
INCHES		mm
.XX ± .03		.X ± .7
.XXX ± .010		.XX ± .25
ANGULAR: ± 2°		COLOR
		NYLON 6/6
		NATURAL



**AVERY
DENNISON**

FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157


DESCRIPTION	
7.5" CABLE TIE, STD., #10 SCREW MOUNT	
STOCK NO.	REV.
08415-0	M

AVERY DENNISON MARKETING SPECIFICATION

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

HISTORY

REV.	DATE	DESCRIPTION
K	11-14-14	MODIFIED DIMS TO BE MORE EASILY INSPECTED; ADDED UL LOGO AND UPDATED THE FORMAT

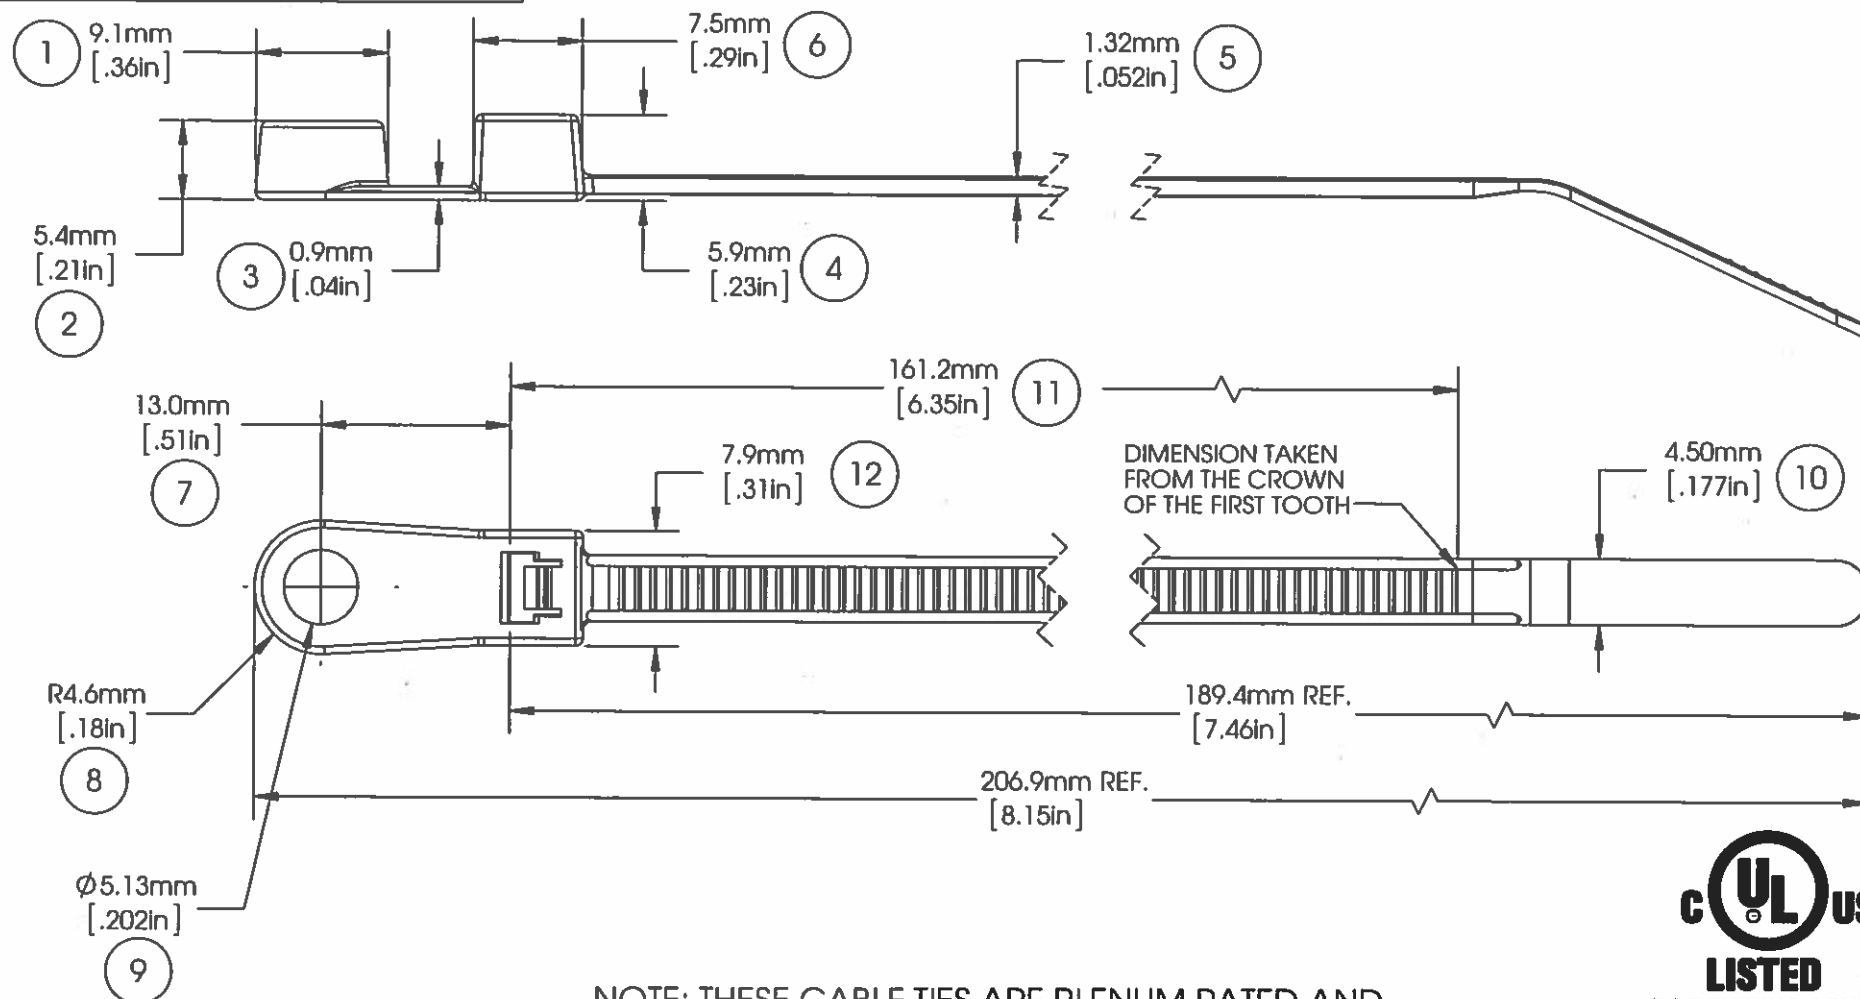

NOTE: THESE CABLE TIES ARE PLENUM RATED AND HAVE A FLAMMABILITY RATING OF V-2



MOUNTING:	# 10 SCREW
LOOP TENSILE STRENGTH:	50 LBF / 220N MIN. PER AS-23190
OPERATING TEMP:	-40°F (-40°C) TO 220°F (105°C)
MIN. INSTALLATION TEMP:	32°F (0°C)
WEIGHT:	0.05 OZ./1.5g
BUNDLE DIAMETER:	1.6mm (.06in) - 44.5mm (1.75in)
INSTALLATION TOOL:	12001 - HAND TOOL 12500 - PNEUMATIC TOOL
TOOL TENSION SETTING:	6 - 8
PACKAGING:	1000/BAG, 5000/CASE

APPROVALS:	ENG. APPR. <i>LO - O M</i> 11/14/14
	Q.A. APPR. <i>Jessie Boyle</i> 11/14/14

SPECIFIED TOLERANCES	
INCHES	MM
.XX ± .03	.X ± .7
.XXX ± .010	.XX ± .25
ANGULAR:	± 2°

MATERIAL	NYLON 6/6, HEAT STABILIZED
COLOR	BLACK


DESCRIPTION	7.5" CABLE TIE, STD., #10 SCREW MOUNT
STOCK NO.	08443-0
REV.	K



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.


REV.	DATE	DESCRIPTION
K	11-19-14	MODIFIED DIMS TO BE MORE EASILY INSPECTED; ADDED UL LOGO AND UPDATED THE FORMAT

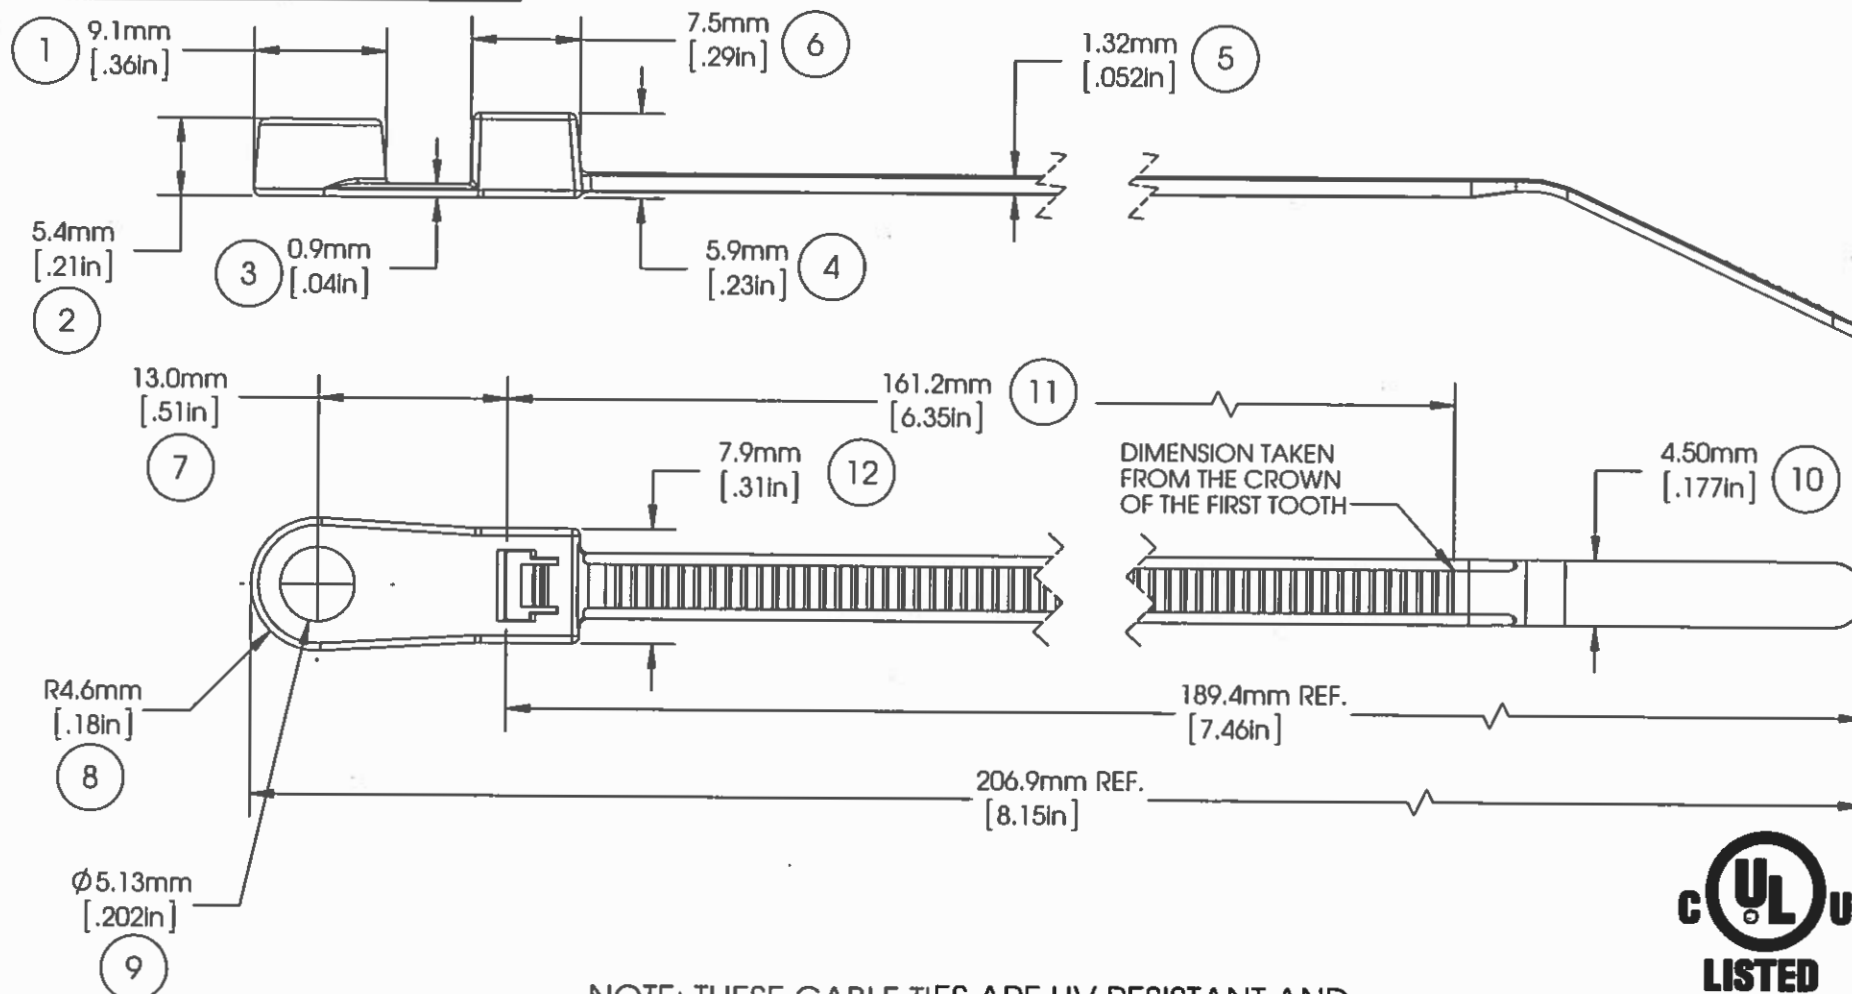

UL
LISTED
POSITIONING DEVICE
E57800
TYPE 21

MOUNTING:	# 10 SCREW
LOOP TENSILE STRENGTH.:	50 LBF / 220N MIN. PER AS-23190
OPERATING TEMP:	-40°F (-40°C) TO 176°F (80°C)
MIN. INSTALLATION TEMP.:	32°F(0°C)
WEIGHT:	0.05 OZ./1.5g
BUNDLE DIAMETER:	Ø 1.6mm (.06in) - Ø 44.5mm (1.75in)
INSTALLATION TOOL:	12001 - HAND TOOL 12500 - PNEUMATIC TOOL
TOOL TENSION SETTING:	6 - 8
PACKAGING:	1000/BAG, 5000/CASE

APPROVALS:	ENG. APPR. <i>[Signature]</i> 11/19/14												
	Q.A. APPR. <i>[Signature]</i> 11/19/14												
<table><tr><td colspan="2">SPECIFIED TOLERANCES</td><td rowspan="2">MATERIAL NYLON 6/6, WEATHER RESISTANT</td></tr><tr><td>INCHES</td><td>MM</td></tr><tr><td>.XX ± .03</td><td>.X ± .7</td><td rowspan="3">COLOR BLACK</td></tr><tr><td>.XXX ± .010</td><td>.XX ± .25</td></tr><tr><td colspan="2">ANGULAR: ± 2°</td></tr></table>		SPECIFIED TOLERANCES		MATERIAL NYLON 6/6, WEATHER RESISTANT	INCHES	MM	.XX ± .03	.X ± .7	COLOR BLACK	.XXX ± .010	.XX ± .25	ANGULAR: ± 2°	
SPECIFIED TOLERANCES		MATERIAL NYLON 6/6, WEATHER RESISTANT											
INCHES	MM												
.XX ± .03	.X ± .7	COLOR BLACK											
.XXX ± .010	.XX ± .25												
ANGULAR: ± 2°													


	AVERY DENNISON	FASTENER DIVISION FITCHBURG, MA 01420 U.S.A. TEL. 1-800-225-5913 FAX. 978-353-8157
DESCRIPTION 7.5" CABLE TIE, STD., #10 SCREW MOUNT		
STOCK NO. 08444-0	REV. K	

AVERY DENNISON MARKETING SPECIFICATION

HISTORY

REV.	DATE	DESCRIPTION
C	06.27.18	ADDED SPECIAL CHARACTERISTICS; DIM 11 WAS MADE REF. DIM 12 CHANGED TO 11
D	02.06.18	ADDED UL RECOGNIZED LOGO

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

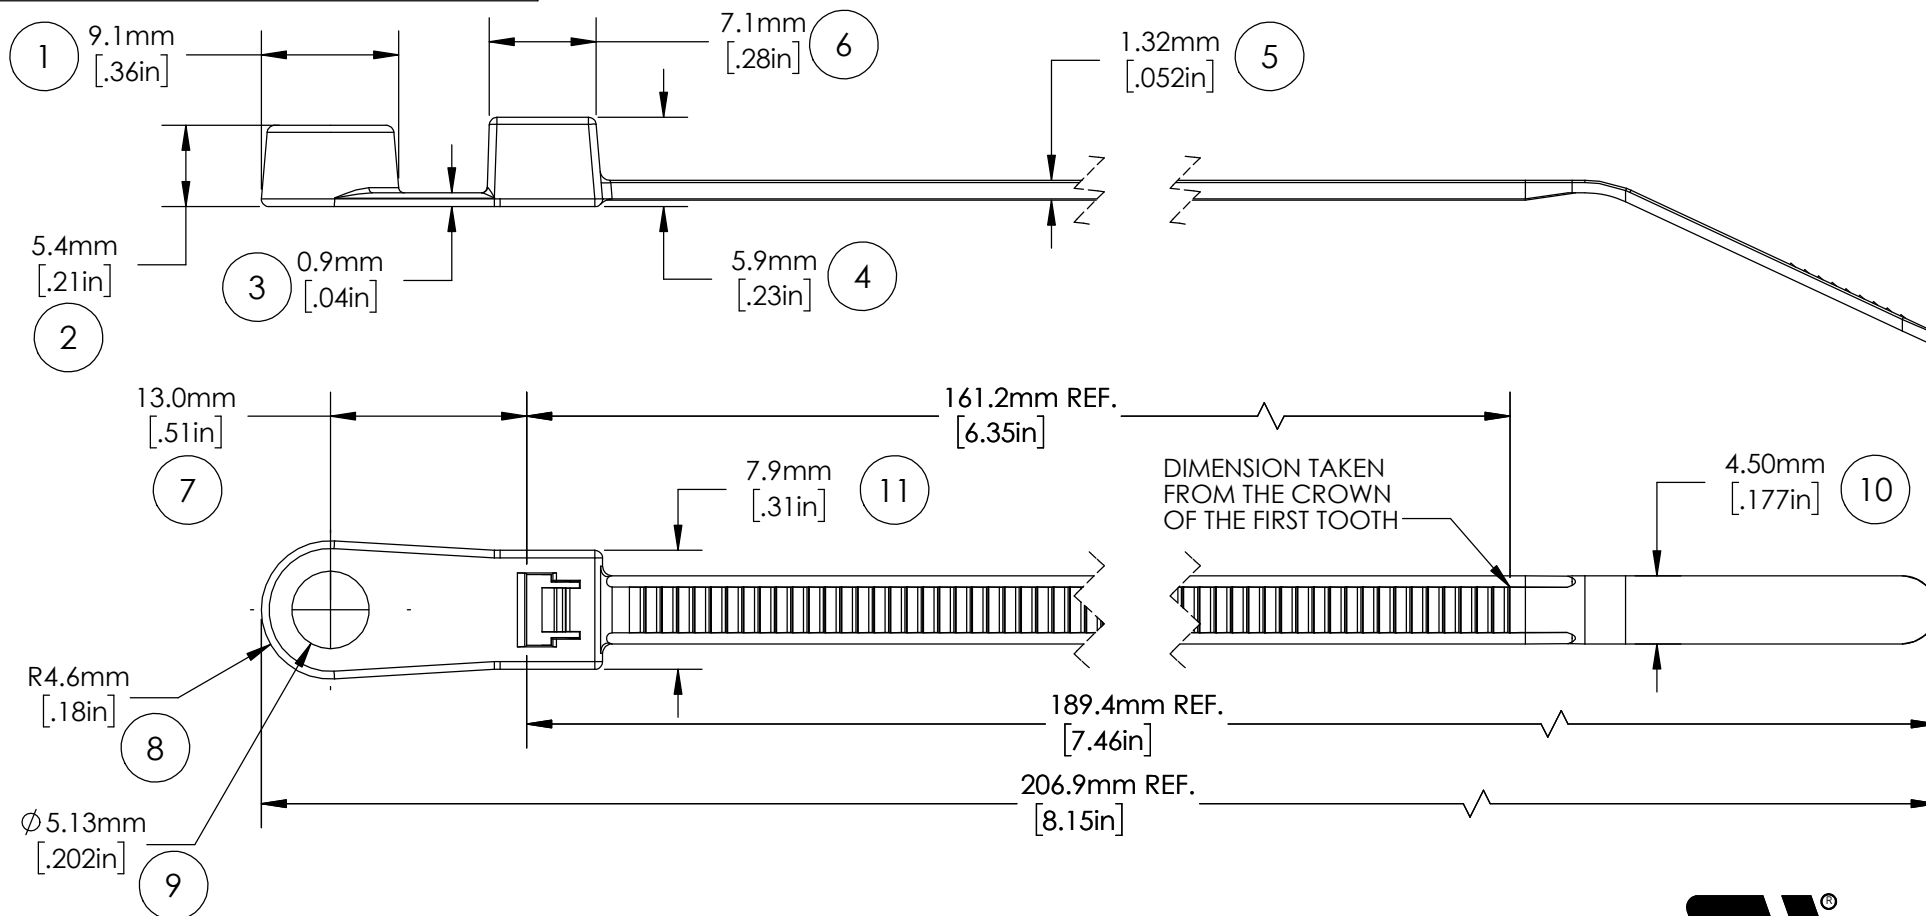

E57800
TYPE 11

12	△ TENSILE STRENGTH:	50 LBF / 220N MIN. PER AS-23190
13	△ FLAMMABILITY RATING:	HB RATED PER FMVSS302
	MOUNTING:	#10 SCREW
	OPERATING TEMP:	-40°F (-40°C) TO 185°F (85°C)
	MIN. INSTALLATION TEMP.:	32°F (0°C)
	WEIGHT:	1.5g/0.05 OZ.
	BUNDLE DIAMETER:	Ø 1.6mm [.06in] - Ø 44.5mm [1.75in]
	INSTALLATION TOOL:	12001 - HAND TOOL 12500 - PNEUMATIC TOOL
	TOOL TENSION SETTING:	6 - 8
	PACKAGING:	100/BAG, 5000/CASE

NOTES:

1. SPECIAL CHARACTERISTICS ARE NOTED BY A TRIANGLE (△)

APPROVALS:	ENG. APPR. <i>Daniel Gilbertson</i>	02.06.19
	Q.A. APPR. <i>Caitlin Vaillancourt</i>	02.06.19

SPECIFIED TOLERANCES
INCHES mm
.XX ± .03 .X ± .7
.XXX ± .010 .XX ± .25
ANGULAR: ± 2°

MATERIAL
NYLON 6/6
COLOR
NATURAL



**AVERY
DENNISON**

FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

DESCRIPTION
7.5" CABLE TIE, STD., #10 SCREW MOUNT
STOCK NO. **08484-0**
REV. **D**