

Standard Fasteners Marketing Specifications

For the following part numbers:

06214-0

06215-0

08035-0

08901-2

08902-2

08948-0

08949-0

08951-0

08952-0

08954-0

08965-0

08966-0

08968-0

08969-0

08970-0

08986-0

10417-0

10656-0

10657-0

10658-0

10659-0

10697-0

10703-0

10704-0

11018-0

11081-0

11084-0

11088-0

11089-0

11240-0

11241-0

17200-0

17201-0

17202-0

17203-0

17204-0

17205-0

17208-0

17210-0


02161 (Europe)

02160 (Europe)

04271 (Europe)

04221 (Europe)

AVERY DENNISON MARKETING SPECIFICATION

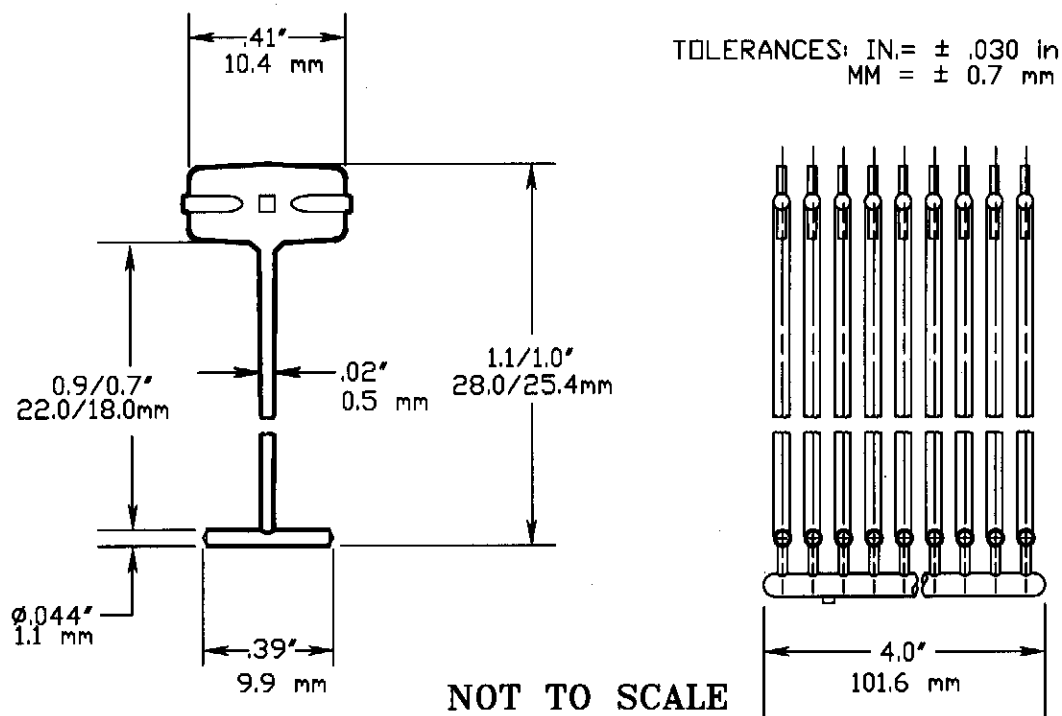

NOMINAL TENSILE STRENGTH:	4.5/5.5 LBSF / 2.0/2.5 KGF
MATERIAL:	POLYPROPYLENE - NATURAL
WEIGHT:	.05 GRAMS/EACH
CLIP QUANTITY:	50
APPLICATION TOOL:	10651 MARK III PISTOL GRIP 08945 STANDARD SCISSOR-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5000/CTN, 50,000/CASE
T/F CONN PADDLES :	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

1" (20mm) SWIFTACH[®], GP PADDLE

APPROVAL:

Eckel 1-30-09


STOCK NO.

06214

REV

F

AVERY DENNISON MARKETING SPECIFICATION

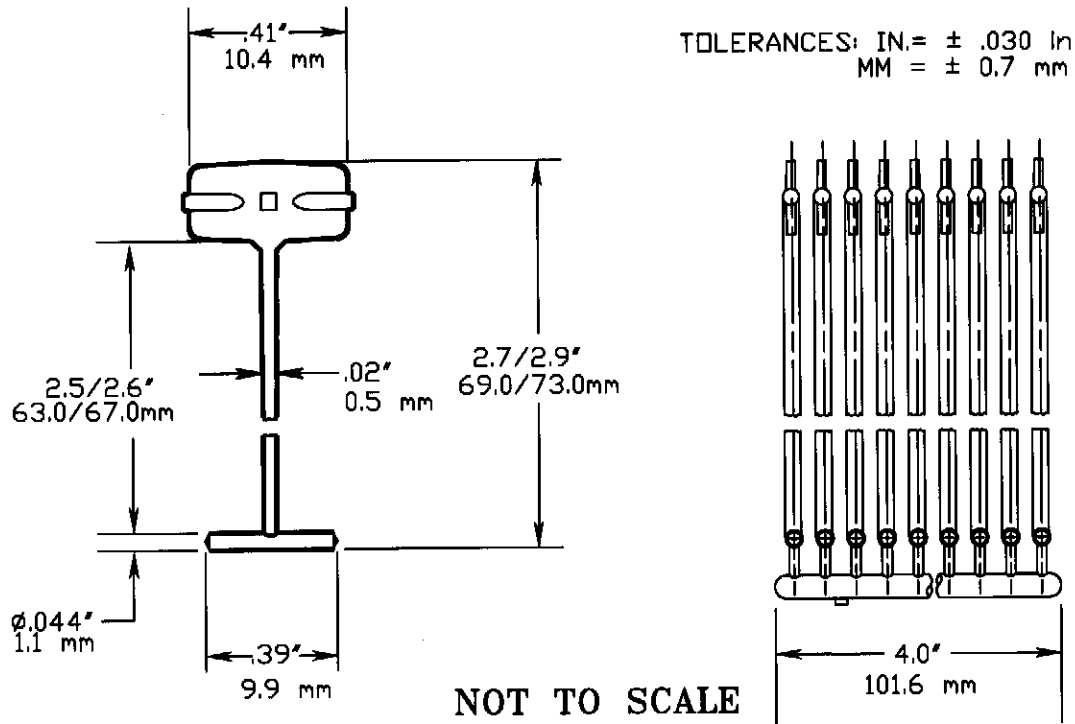

NOMINAL TENSILE STRENGTH:	4.5/5.5 LBSF / 2.0/2.5 KGF
MATERIAL:	POLYPROPYLENE - NATURAL
WEIGHT:	.054 GRAMS/EACH
CLIP QUANTITY:	50
APPLICATION TOOL:	10651 MARK III PISTOL GRIP 08945 STANDARD SCISSOR-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5000/CTN, 50,000/CASE
T/F CONN PADDLES	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

3" (65mm) SWIFTACH[®], GP PADDLE

APPROVAL:

[Signature] 1-30-09


STOCK NO.

06215


REV

D

AVERY DENNISON MARKETING SPECIFICATION

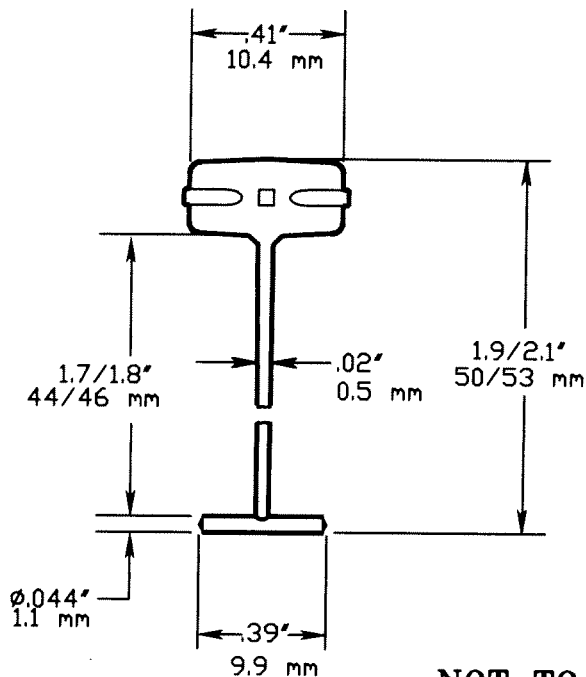

TOLERANCES: IN. = $\pm .030$ in
 MM = ± 0.7 mm

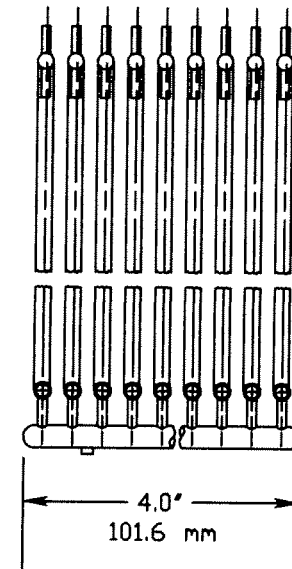

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	4.5/5.5 LBSF / 2.0/2.5 KGF
MATERIAL:	POLYPROPYLENE - NATURAL
WEIGHT:	.054 GRAMS/EACH
CLIP QUANTITY:	50
APPLICATION TOOL:	10651 MARK III PISTOL GRIP 08945 STANDARD SCISSOR-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5000/CTN, 50,000/CASE
T/F CONN PADDLES	YES



FASTENER DIVISION
 FITCHBURG, MA 01420 U.S.A.
 TEL. 1-800-225-5913
 MA. 978-353-8157

DESCRIPTION:

45mm SWIFTACH® PADDLE

APPROVAL:


[Signature] 7-30-10

STOCK NO.


08035

REV
D

AVERY DENNISON MARKETING SPECIFICATION

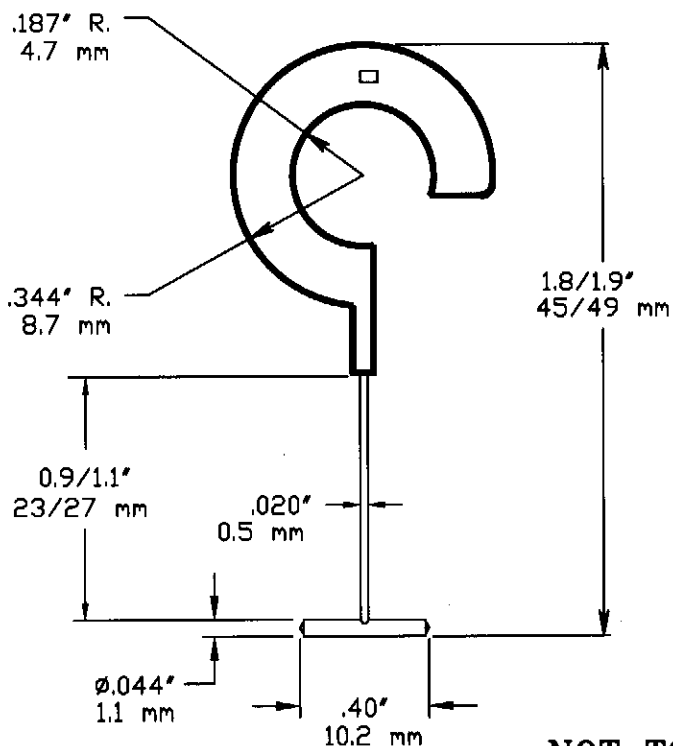

TOLERANCES: IN. = $\pm .030$ in
MM = ± 0.7 mm

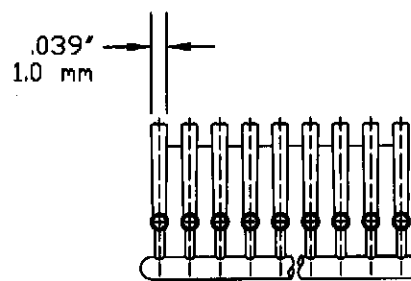

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	3/5 LBSF.
MATERIAL:	POLYPROPYLENE - NATURAL
CLIP QUANTITY:	50
APPLICATION TOOL:	08945 STANDARD SCISSOR-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5000/CTN, 50,000/CASE
T/F CONN PADDLES	YES



**AVERY
DENNISON**

FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

1" (25mm) SWIFTACH[®], GP HOOKS

APPROVAL:


E. J. H. 3-5-09

STOCK NO.


08901-2

REV
B

AVERY DENNISON MARKETING SPECIFICATION

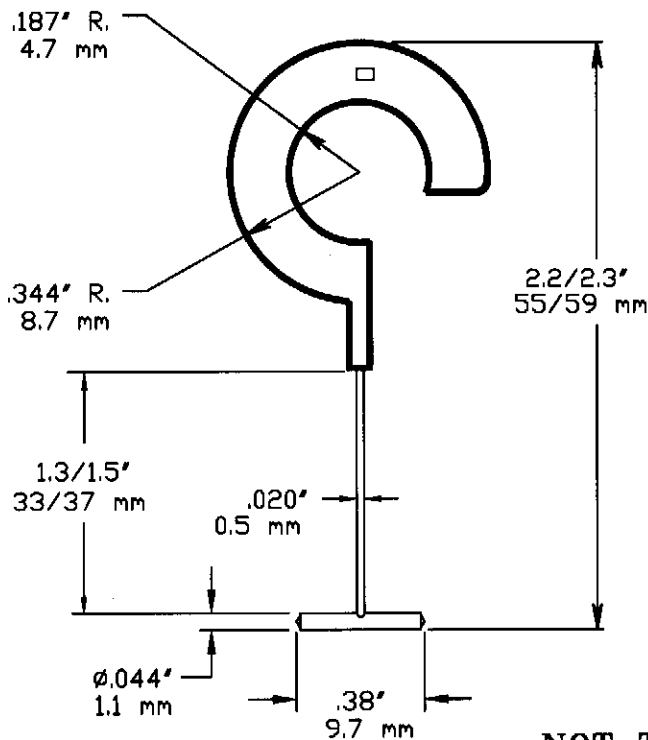

TOLERANCES: IN. = $\pm .030$ in
MM = ± 0.7 mm

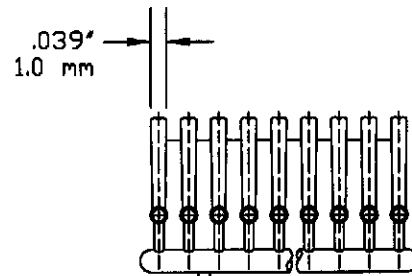

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	3/5 LBSF.
MATERIAL:	POLYPROPYLENE - NATURAL
CLIP QUANTITY:	50
APPLICATION TOOL:	08945 STANDARD SCISSOR-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5000/CTN, 50,000/CASE
T/F CONN PADDLES	YES



**AVERY
DENNISON**

FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

1.38" (35mm) SWIFTACH[®], GP HOOKS

APPROVAL:


Eck 3-3-09

STOCK NO.


08902-2

REV
B

AVERY DENNISON MARKETING SPECIFICATION

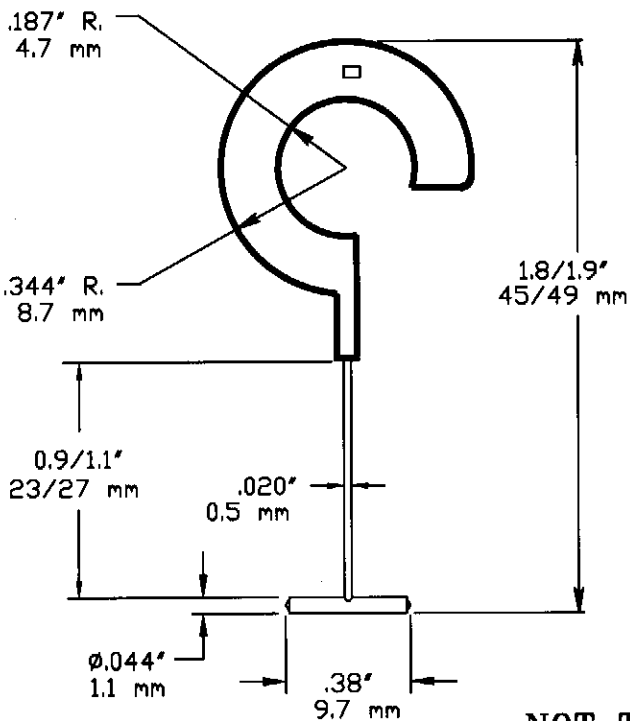

TOLERANCES: IN. = $\pm$.030 in
MM = $\pm$ 0.7 mm

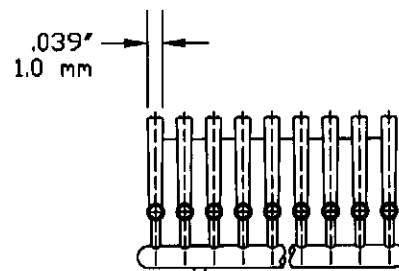

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	5/7 LBSF.
MATERIAL:	NYLON 6 - NATURAL
CLIP QUANTITY:	50
APPLICATION TOOL:	08945 STANDARD SCISSOR-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5000/CTN, 50,000/CASE
T/F CONN PADDLES	YES



**AVERY
DENNISON**

FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

1" (25mm) SWIFTACH[®], GP HOOKS

APPROVAL:

Ed [Signature] 3-3-09


STOCK NO.

08903-2

REV
B

EVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. =± .030 IN.
MM =± 0.7 mm

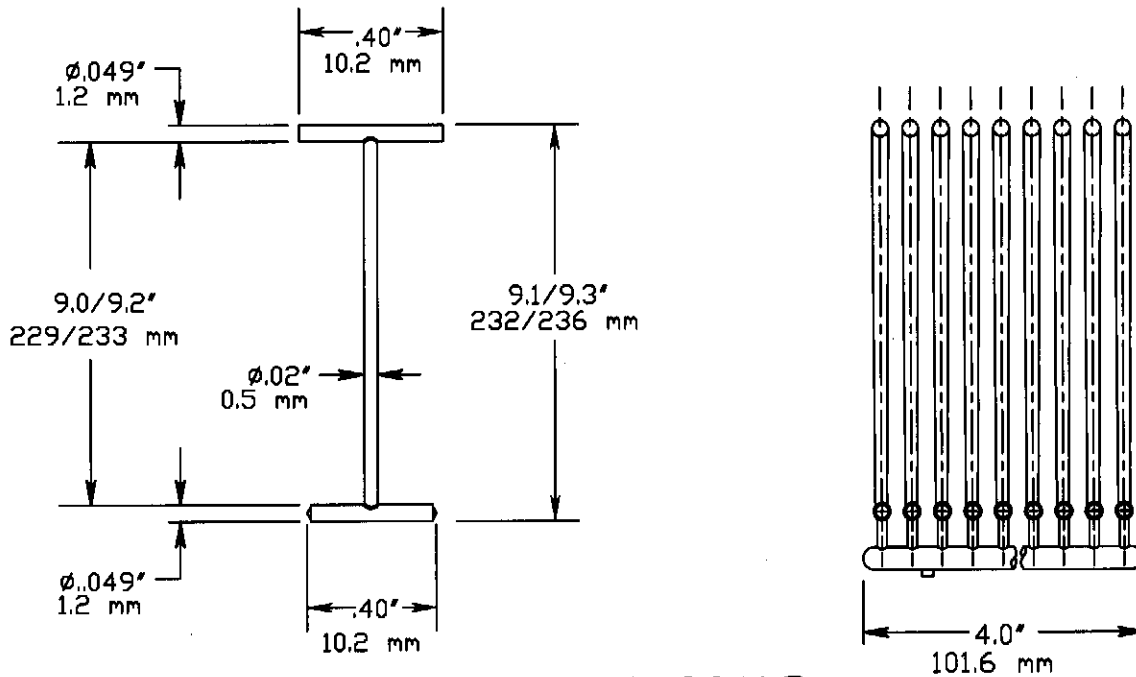

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	5/7 LBSF / 2.3/3.2 KGF
MATERIAL:	NYLON: TYPE 6 - NATURAL
WEIGHT/FASTENER:	.00289 oz. / .085 grams
CLIP QUANTITY:	50
APPLICATION TOOL:	10651 MARK III PISTOL GRIP 08945 STANDARD SCISSOR-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5,000/CTN., 50,000/CASE
T/F CONN. PADDLES	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 1-800-848-2169

DESCRIPTION:

9" (231mm) Swiftach® HD T-End

APPROVAL:


Ech 1-30-09

STOCK NO.

08948

REV
K

AVERY DENNISON MARKETING SPECIFICATION

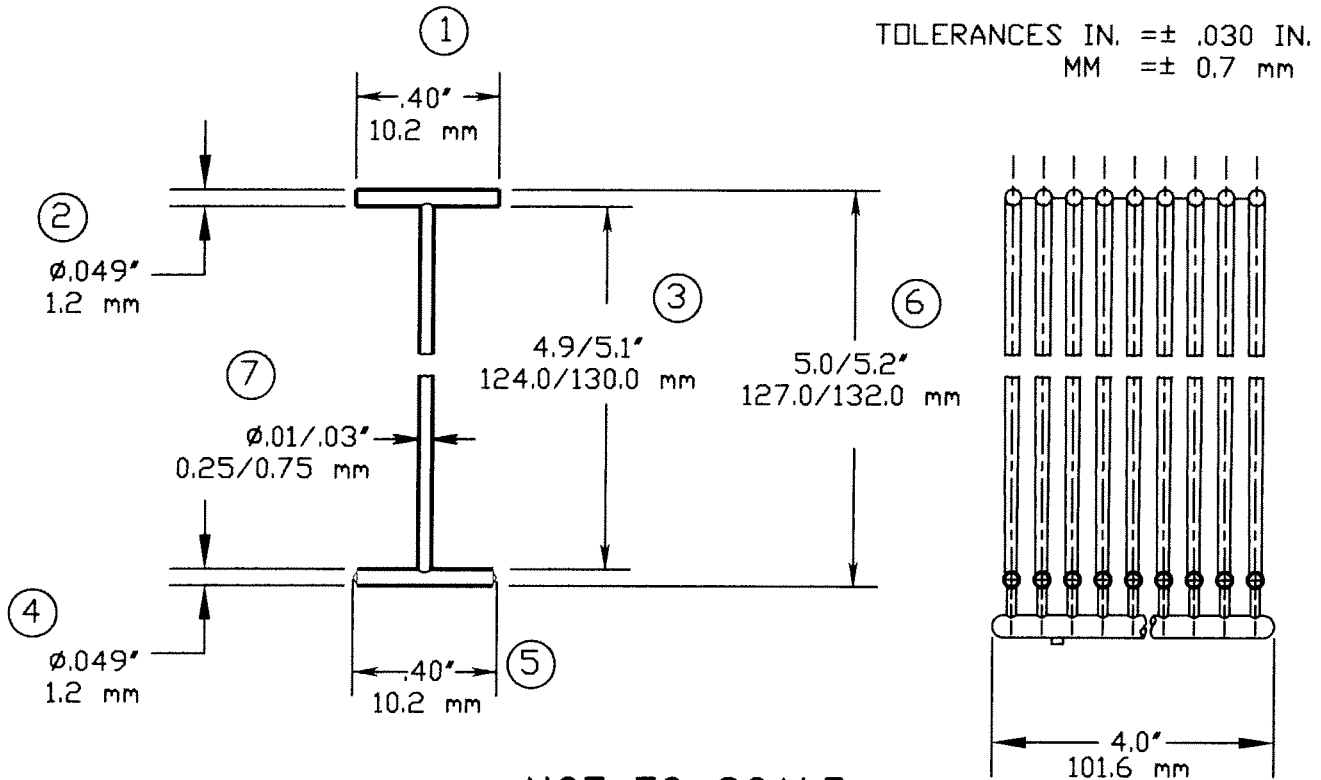

NOT TO SCALE

MIN. APPLIED TENSILE STRENGTH:	5/7 LBSF / 2.3/3.2 KGF
MATERIAL:	NYLON: TYPE 6 - NATURAL
WEIGHT/FASTENER:	.00204 oz. / .060 grams
CLIP QUANTITY:	50
APPLICATION TOOL:	10651 MARK III PISTOL GRIP 08945 STANDARD SCISSOR-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5000/CTN, 50,000/CASE
T/F CONNECTORS:	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 1-800-848-2169

DESCRIPTION:

5" (132mm) Swiftach HD T-End

APPROVALS: Q.A.

[Signature] 6/27/2013

STOCK NO.


08949

REV

K

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. $\pm .030$ IN.
MM ± 0.7 mm

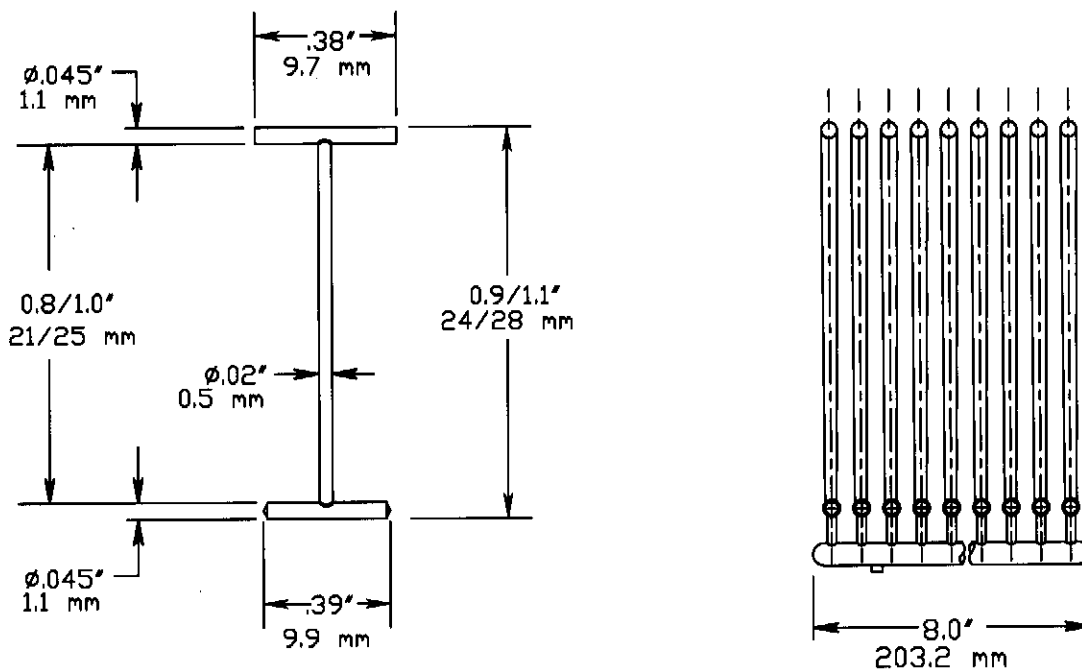

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	5 - 7 LBSF / 2.3 - 3.2 KGF
MATERIAL:	NYLON TYPE 6 - NATURAL
WEIGHT/FASTENER:	0.0010 oz. / 0.029 grams
CLIP QUANTITY:	100
APPLICATION TOOL:	10651 MARK III PISTOL GRIP 08945 STANDARD SCISSOR-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5,000/CTN., 50,000/CASE
T/F CONN. PADDLES	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 1-800-848-2169

DESCRIPTION:

1" (23mm) Swiftach[®] HD T-End

APPROVAL:


E. J. M. 1-12-09

STOCK NO.


08951

REV
L

AVERY DENNISON MARKETING SPECIFICATION

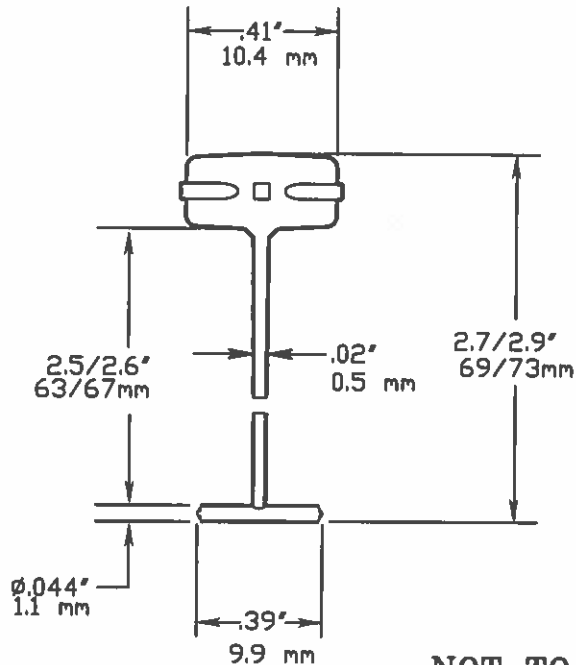

TOLERANCES: IN. = $\pm .030$ in
MM = ± 0.7 mm

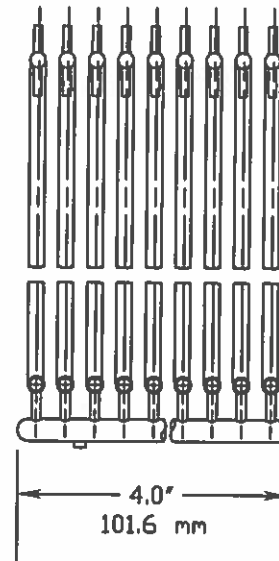

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	4.5/5.5 LBSF / 2.0/2.5 KGF
MATERIAL:	POLYPROPYLENE
WEIGHT:	.054 GRAMS/EACH
CLIP QUANTITY:	50
APPLICATION TOOL:	10651 MARK III PISTOL GRIP 08945 STANDARD SCISSOR-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5000/CTN, 50,000/CASE
T/F CONN PADDLES	YES

08952-0	NATURAL
08962-0	DK. BLUE
08965-0	GREEN
08966-0	ORANGE
08968-0	RED
08969-0	YELLOW
08970-0	LT. BLUE
08986-0	BLACK

11240-0	PINK
11241-0	WHITE



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

3" (65mm) SWIFTACH[®], PADDLE

APPROVAL:

Linda Boyle 6-15-2018

STOCK NO.



SEE ABOVE

REV

G

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. =± .030 IN.
MM =± 0.7 mm

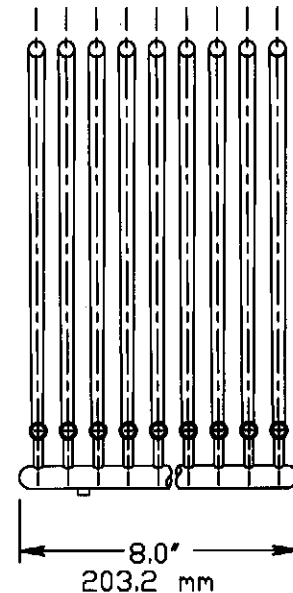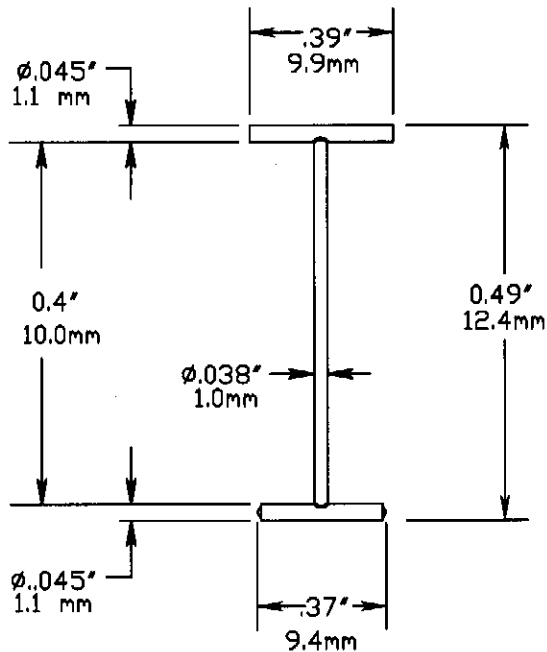

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	5/7 LBSF / 2.3/3.2 KGF
MATERIAL:	NYLON TYPE 6 - NATURAL
WEIGHT/FASTENER:	0.0010 oz. / 0.029 grams
CLIP QUANTITY:	100
APPLICATION TOOL:	10651 MARK III PISTOL GRIP 08945 STANDARD SCISSOR-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5,000/CTN., 50,000/CASE
T/F CONN. PADDLES	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 1-800-848-2169

DESCRIPTION:

1/2" (10mm) Swiftach® HD T-End

APPROVAL:


Edell 1-30-09

STOCK NO.


08954

REV
J

AVERY DENNISON MARKETING SPECIFICATION

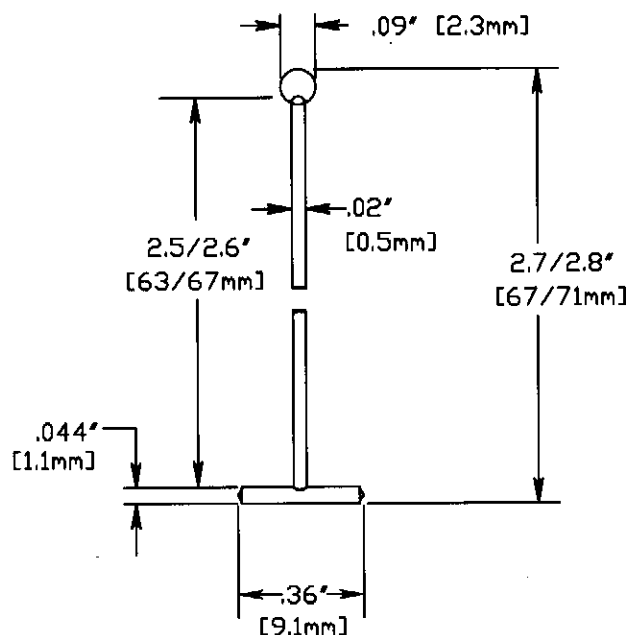

TOLERANCES: IN. = $\pm .030$ in
MM = ± 0.7 mm

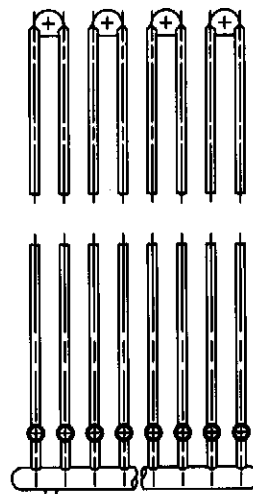

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	5/7 LBSF. / 2.3/3.2 KGF.
MATERIAL:	NYLON 6 - NATURAL
CLIP QUANTITY:	25 LOOPS
APPLICATION TOOL:	08945 - MARK II SCISSOR GRIP 10651 - MARK III PISTOL GRIP SEE SALES SPECIALIST FOR POWER EQUIPMENT OPTIONS.
PACKAGED IN:	5000/CTN., 50,000/CASE
T/F CONN PADDLES	NO



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 1-800-848-2169

DESCRIPTION:

3" (65mm) Swiftach Loop

APPROVAL:

[Signature] 1-30-99


STOCK NO.

08989


REV

G

AVERY DENNISON MARKETING SPECIFICATION

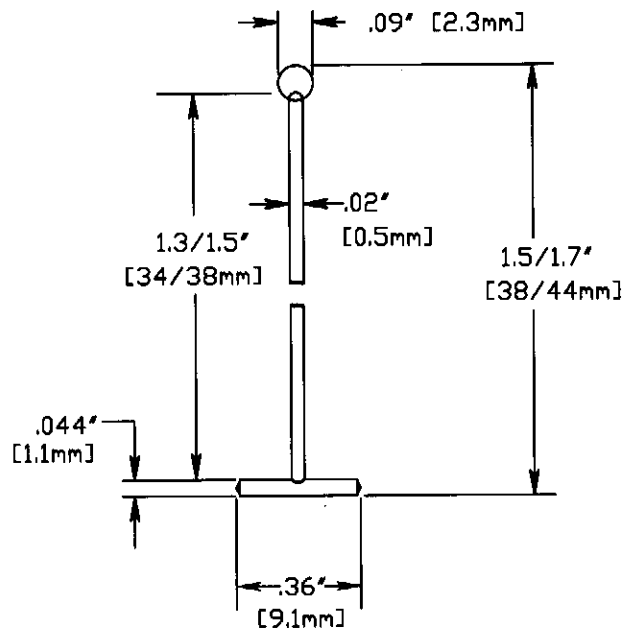

TOLERANCES: IN. = $\pm .030$ in
MM = ± 0.7 mm

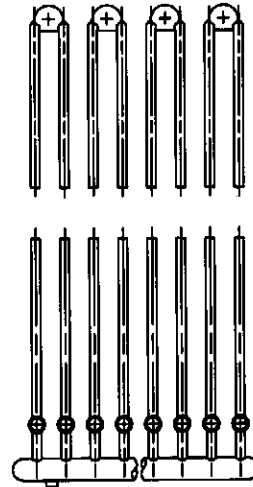

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	5/7 LBSF. / 2.3/3.2 KGF.
MATERIAL:	NYLON 6 - NATURAL
CLIP QUANTITY:	25 LOOPS
APPLICATION TOOL:	08945 - MARK II SCISSOR GRIP 10651 - MARK III PISTOL GRIP SEE SALES SPECIALIST FOR POWER EQUIPMENT OPTIONS.
PACKAGED IN:	5000/CTN., 50,000/CASE
T/F CONN PADDLES	NO



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 1-800-848-2169

DESCRIPTION:

1-1/2" (36mm) Swiftach Loop

APPROVAL:

Edy 1-30-09


STOCK NO.

08987

REV

G

AVERY DENNISON MARKETING SPECIFICATION

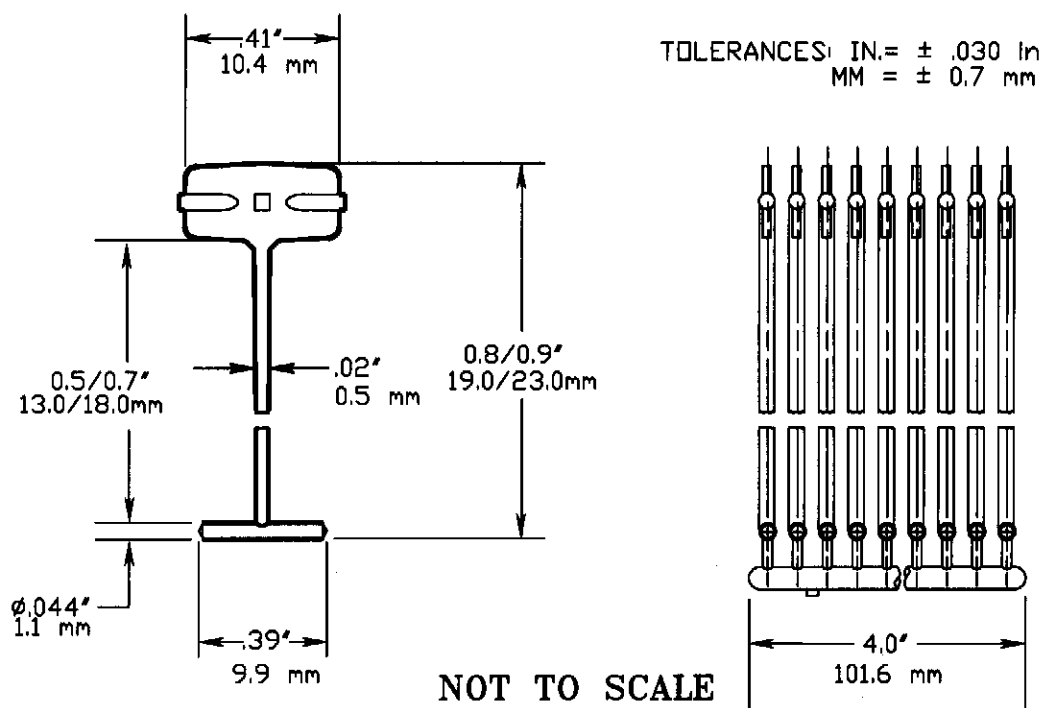

NOMINAL TENSILE STRENGTH:	3.5/4.5 LBSF / 1.5/2.0 KGF
MATERIAL:	POLYPROPYLENE - NATURAL
WEIGHT:	.05 GRAMS/EACH
CLIP QUANTITY:	50
APPLICATION TOOL:	10651 MARK III PISTOL GRIP 08945 STANDARD SCISSOR-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5000/CTN, 50,000/CASE
T/F CONN PADDLES :	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

1/2" (50mm) SWIFTACH[®], PADDLE

APPROVAL:

Eck 1-30-09

STOCK NO.



10417

REV

E

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. =± .030 IN.
MM =± 0.7 mm

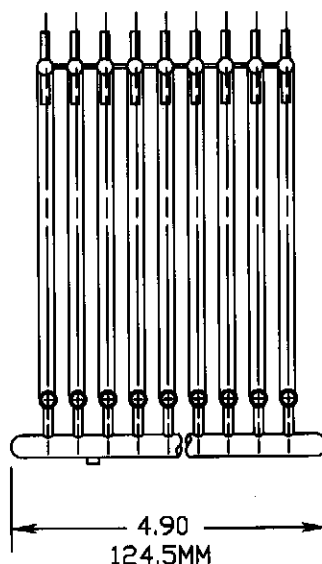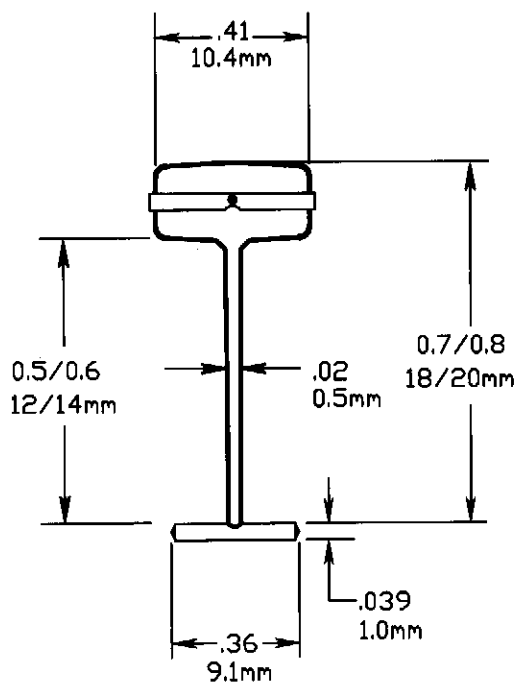

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	4.5/5.5 LBSF. / 2.0/2.5 KGF.
MATERIAL:	POLYPROPYLENE - NATURAL
WEIGHT:	0.035 GRAM
CLIP QUANTITY:	100
APPLICATION TOOL:	10651 MARK III HAND TOOL <CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT>
PACKAGED IN:	BOX OF 10,000
T/F CONN PADDLES:	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

1/2" (13mm) SWIFTACH® PLUS

APPROVAL: Q.A.

[Signature] 1-30-09

STOCK NO.



10656

REV

D

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. = $\pm .030$ IN.
MM = ± 0.7 mm

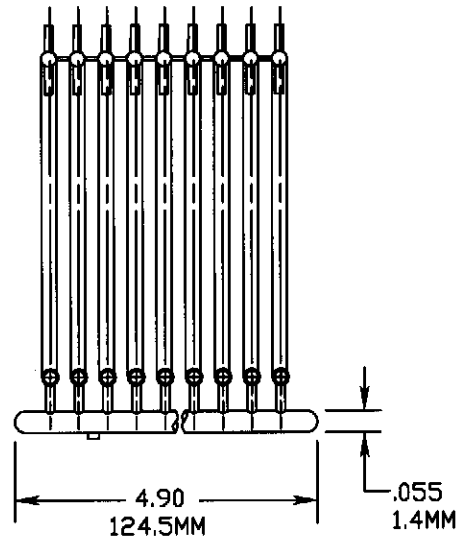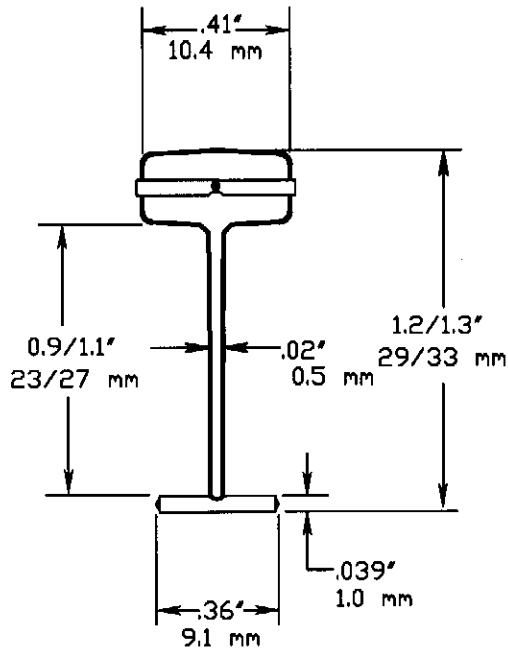

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	4.5 - 5.5 LBSF / 2.0 2.5 KGF
MATERIAL:	POLYPROPYLENE - NATURAL
WEIGHT:	0.035 GRAM
CLIP QUANTITY:	100
APPLICATION TOOL:	10651 MARK III HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	10,000/CTN, 100,000/CASE
T/F CONN PADDLES:	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

1" (25mm) SWIFTACH[®] PLUS

APPROVAL:

E. J. H. 1-12-09

STOCK NO.



10657

REV

C

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. =± .030 IN.
MM =± 0.7 mm

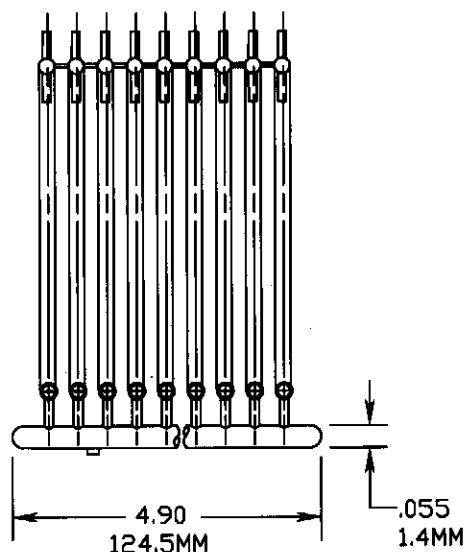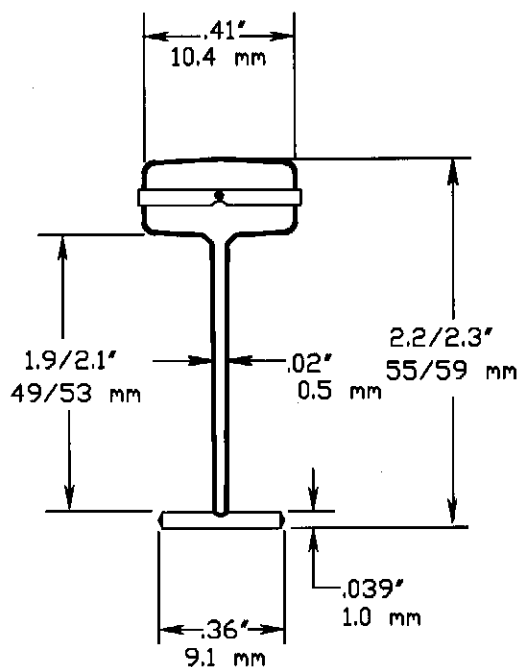

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	4.5 - 5.5 LBSF / 2.0 2.5 KGF
MATERIAL:	POLYPROPYLENE - NATURAL
WEIGHT:	0.046 GRAM
CLIP QUANTITY:	100
APPLICATION TOOL:	10651 MARK III HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	10,000/CTN, 100,000/CASE
T/F CONN PADDLES:	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

2" (51mm) SWIFTACH[®] PLUS

APPROVAL:


E. J. M. 1-12-09

STOCK NO.


10658

REV
C

AVERY DENNISON MARKETING SPECIFICATION

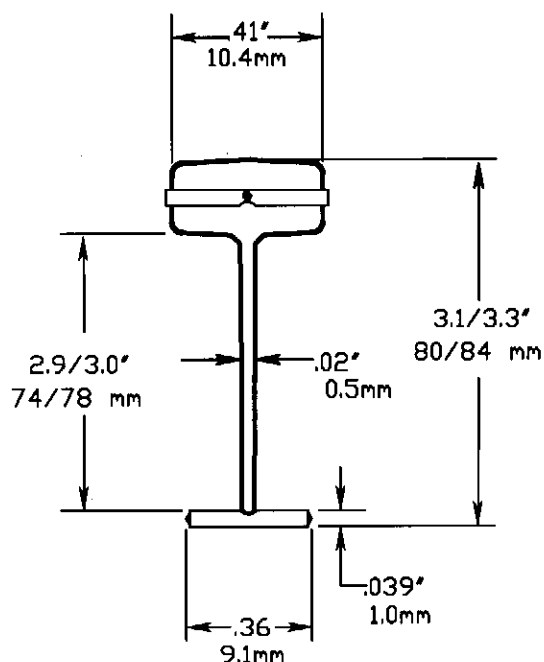

TOLERANCES IN. = $\pm .030$ IN.
MM = ± 0.7 mm

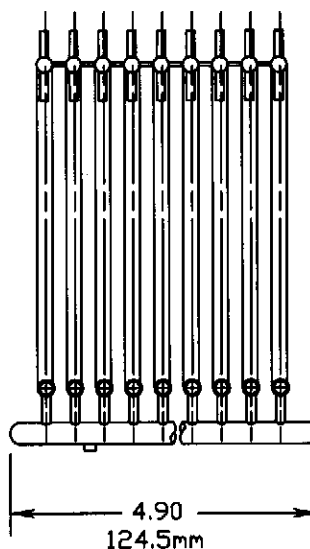

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	4.5 - 5.5 LBSF / 2.0 - 2.5 KGF
MATERIAL:	POLYPROPYLENE - NATURAL
WEIGHT:	0.048 GRAM
CLIP QUANTITY:	100
APPLICATION TOOL:	10651 MARK III HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	10,000/CTN, 100,000/CASE
T/F CONN PADDLES:	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

3" (76mm) SWIFTACH[®] PLUS

APPROVAL:

E. J. [Signature] 1-12-09

STOCK NO.


10659

REV

C

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. =± .030 IN.
MM =± 0.7 mm

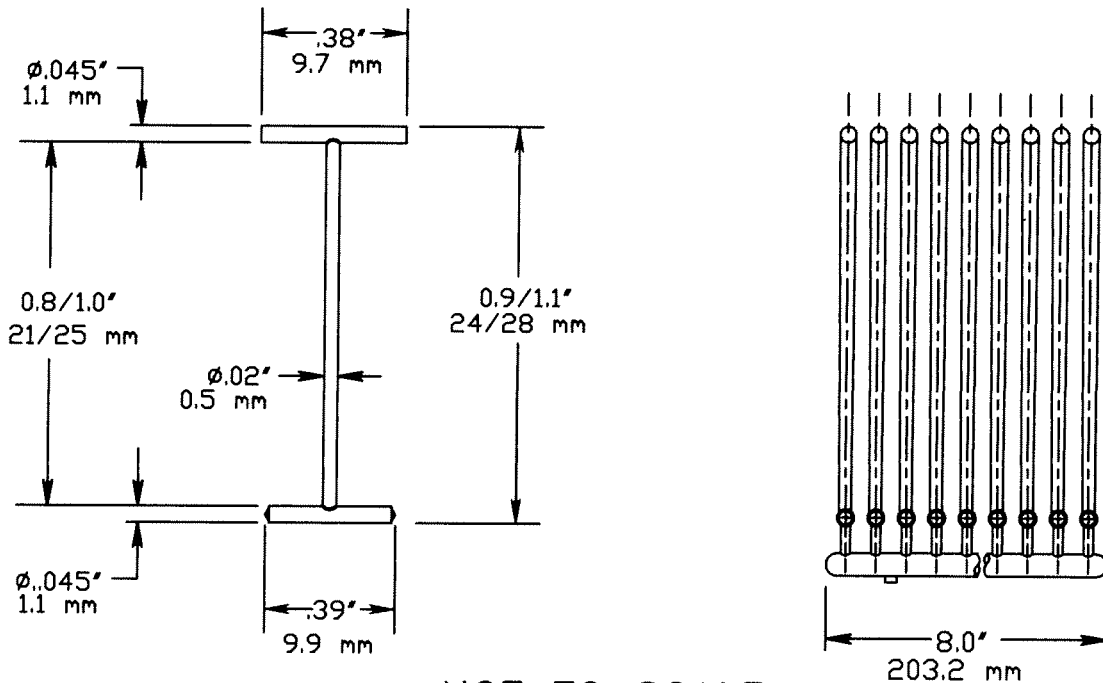

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	5/7 LBSF / 2.3/3.2 KGF
MATERIAL:	NYLON: TYPE 6 - NATURAL
WEIGHT/FASTENER:	0.0010 oz. / 0.029 grams
CLIP QUANTITY:	100
APPLICATION TOOL:	10651 MARK III PISTOL GRIP 08945 STANDARD SCISSOR-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5,000/CTN., 50,000/CASE
T/F CONN. PADDLES	NO



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 1-800-848-2169

DESCRIPTION:

1" (23mm) Swiftach® HD T-End

APPROVAL:

[Signature] 7-30-10



STOCK NO.

10697

REV
D

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. = ± .030 IN.
MM = ± 0.7 mm

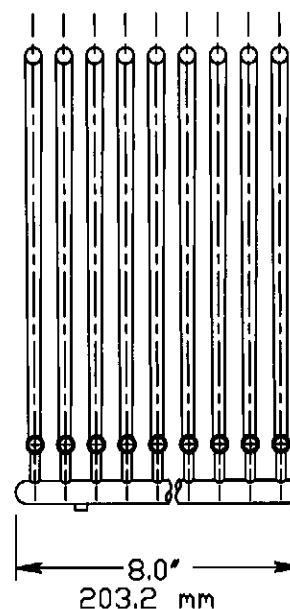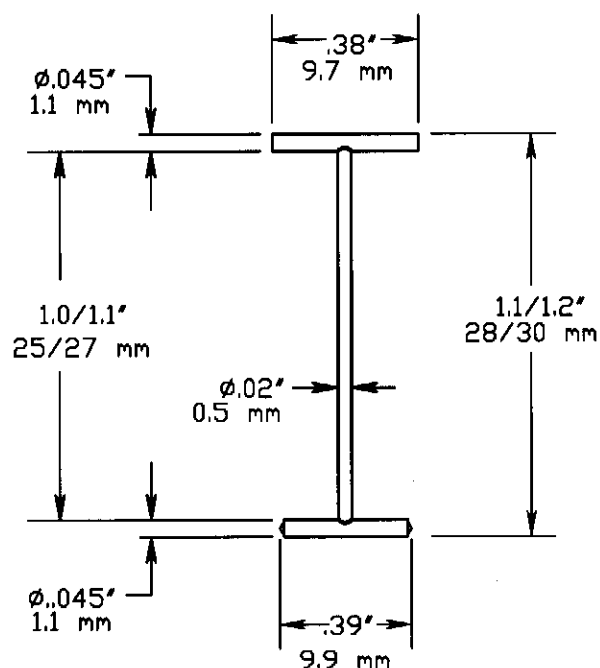

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	5/7 LBSF / 2.3/3.2 KGF
MATERIAL:	NYLON: TYPE 6 - NATURAL
WEIGHT/FASTENER:	0.0010 oz. / 0.029 grams
CLIP QUANTITY:	100
APPLICATION TOOL:	10651 MARK III PISTOL GRIP 08945 STANDARD SCISSOR-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5,000/CTN., 50,000/CASE
T/F CONN. PADDLES	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 1-800-848-2169

DESCRIPTION:

1-1/8" (26mm) Swiftach® HD T-End

APPROVAL:

E. J. [Signature] 1-30-09



STOCK NO.

10703

REV
C

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. = ± .030 IN.
MM = ± 0.7 mm

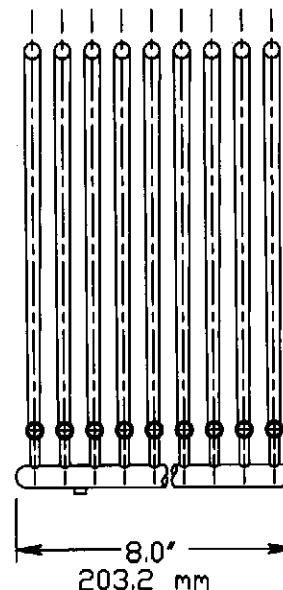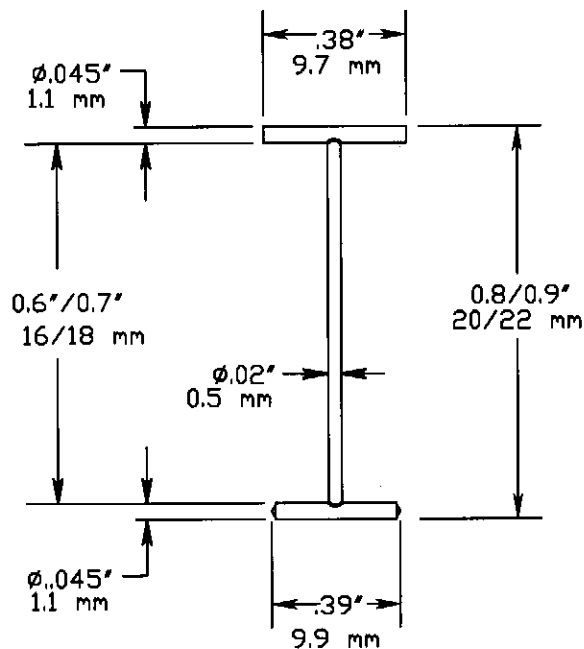

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	5/7 LBSF / 2.3/3.2 KGF
MATERIAL:	NYLON: TYPE 6 - NATURAL
WEIGHT/FASTENER:	0.0010 oz. / 0.029 grams
CLIP QUANTITY:	100
APPLICATION TOOL:	10651 MARK III PISTOL GRIP 08945 STANDARD SCISSOR-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5,000/CTN., 50,000/CASE
T/F CONN. PADDLES	YES



**AVERY
DENNISON**

FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 1-800-848-2169

DESCRIPTION:

3/4" (17mm) Swiftach® HD T-End

APPROVAL:

Eddy 1-30-99


STOCK NO.

10704

REV
C

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. = $\pm .030$ IN.
MM = ± 0.7 mm

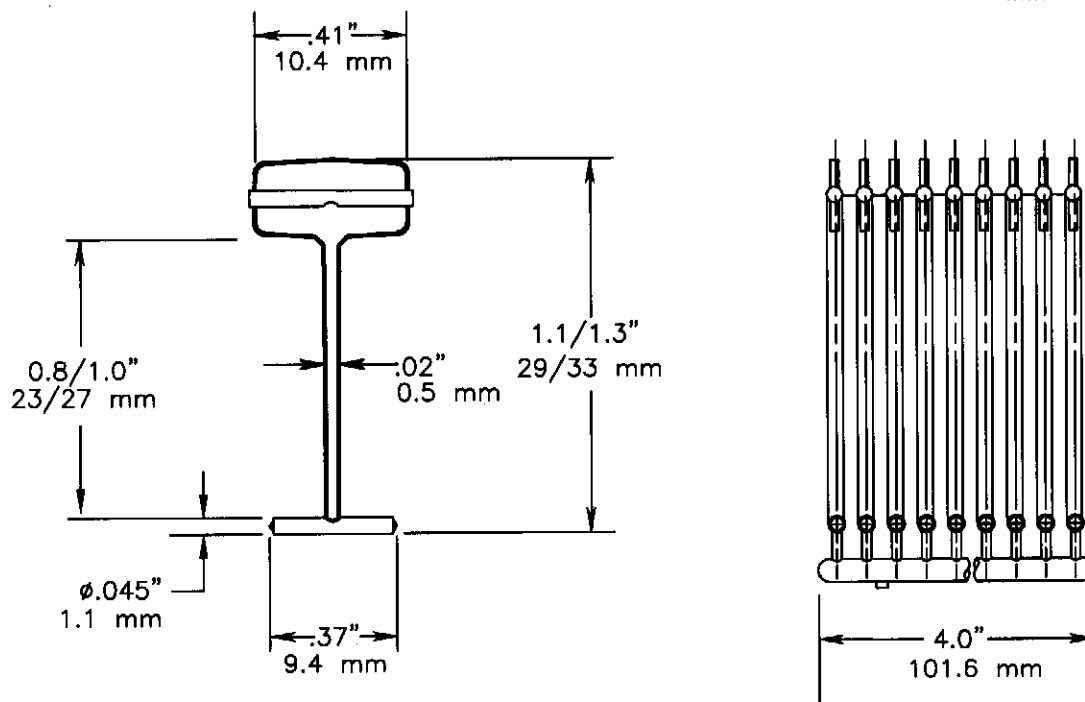

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	4.5/5.5 LBSF. / 2.0/2.5 KGF.
MATERIAL:	POLYPROPYLENE – NATURAL
WEIGHT:	.05 GRAMS/EACH
CLIP QUANTITY:	50
APPLICATION TOOL:	10651 MARK III PISTOL GRIP (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5000/CTN, 50,000/CASE
T/F CONN PADDLES	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 1-800-848-2169

DESCRIPTION:

1" (25mm) FILAMENT SWIFTACH®

APPROVAL:

Ed Bell 1-30-09

STOCK NO.


11018

REV

C

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. = $\pm .030$ IN.
mm = ± 0.7 mm

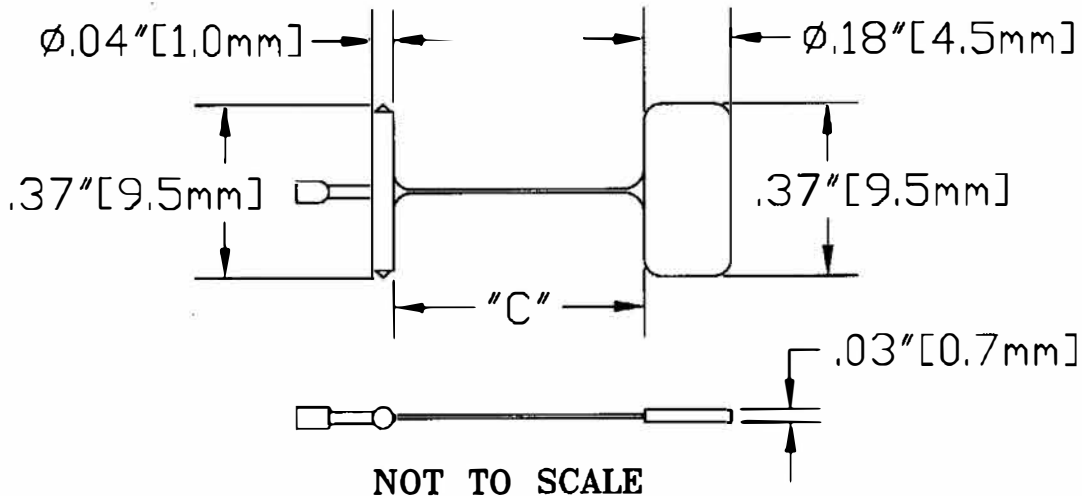

NOMINAL TENSILE STRENGTH:	5/7 LBSF. / 2.3/3.2 KGF.
MATERIAL:	NYLON - SEE TABLE
PIECES/CLIP:	100
PITCH:	CLOSE
PACKAGED:	10,000/CTN, 100,000/CASE
T/F CONN PADDLES:	YES

SKU #	COLOR	"C" DIM.	DESCRIPTION
11077	NATURAL	.57/.61" [14.5/15.5mm]	19/32" [15mm]
		'	'
		'	'
	□	'	'
11081	NATURAL	.77/.80" [19.5/20.5mm]	25/32" [20mm]
		'	'
11083	NATURAL	.96/1.0" [24.5/25.5mm]	1" [25mm]
11084	NATURAL	1.36/1.40" [34.5/35.5mm]	1 3/8" [35mm]
		'	'
		'	'
	□	'	'
11088	NATURAL	1.95/2.0" [49.5/50.5mm]	2" [50mm]
11089	NATURAL	2.54/2.58" [64.5/65.5mm]	2 1/2" [65mm]



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5813
FAX. 1-800-848-2169

DESCRIPTION:

SWIFT, HEAVY DUTY, STANDARD

APPROVAL:

E. J. M. R. 1-30-09

STOCK NO.



SEE ABOVE

REV

D

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. = ± .030 IN.
MM = ± 0.7 mm

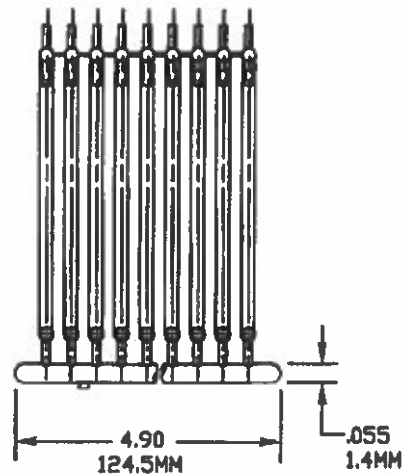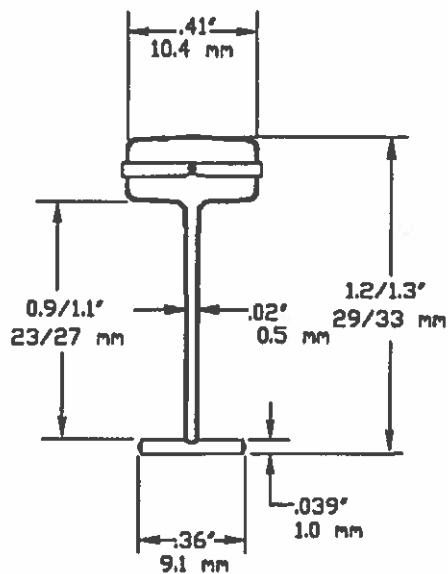

NOT TO SCALE

PART NO.	COLOR
17200-0	DARK BLUE
17201-0	LIGHT BLUE
17202-0	GREEN
17203-0	ORANGE
17204-0	RED
17205-0	YELLOW
17208-0	PINK
17210-0	BLACK

NOMINAL TENSILE STRENGTH:	4.5 - 5.5 LBF / 2.0 - 2.5 KGF
MATERIAL:	POLYPROPYLENE
WEIGHT:	0.035 GRAMS
CLIP QUANTITY:	100
APPLICATION TOOL:	10651 MARK III HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	10,000/CARTON; 100,000 CASE
T/F CONN PADDLES:	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

DESCRIPTION:

1" (25mm) SWIFTACH® PLUS – COLORED

APPROVAL:

[Signature] 08/30/2007
STOCK NO.


SEE TABLE

REV

A

AVERY DENNISON

MARKETING SPECIFICATION DATASHEET

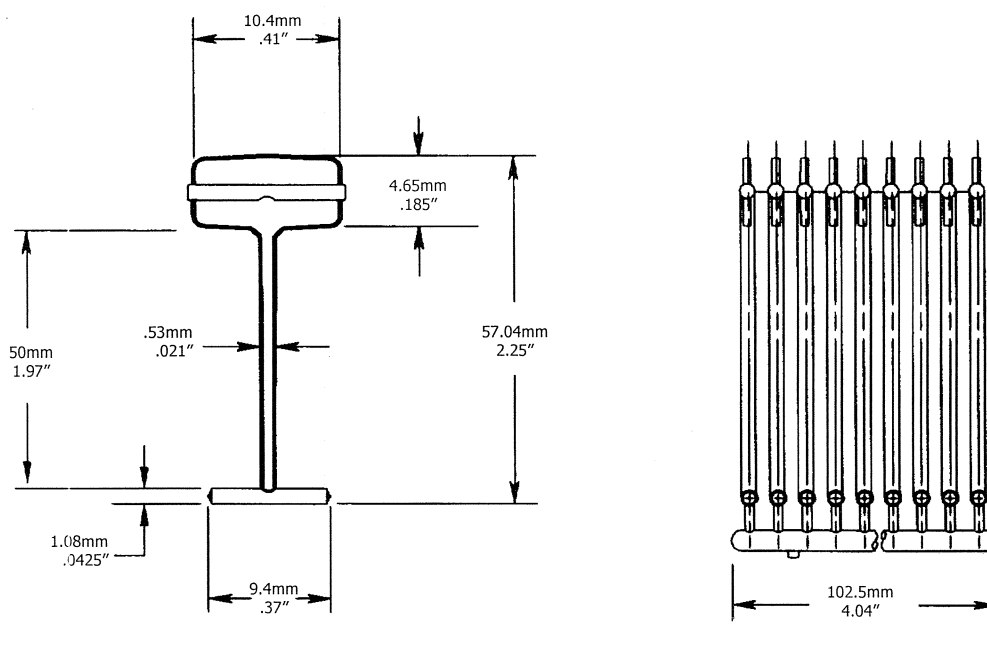

NOT TO SCALE

MIN. APPLIED TENSILE STRENGTH:	4.5 LBSF. / 2 KGF.
MATERIAL:	PP
WEIGHT:	.05 GRAMS / EACH
CLIP QUANTITY:	50
APPLICATION TOOL:	10651 MARK III PISTOL GRIP 08945 STANDARD SCISSOR GRIP MARK II HAND TOOL (CONTACT LOCAL SALES AGENT FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5,000/CTN - 50,000/CASE
T/F CONN PADDLES	YES



Fastener Division


AVERY DENNISON
FASTENER DIVISION
1 THOMAS ROAD
WOOBURN INDUSTRIAL PARK
WOOBURN GREEN
BUCKS. HP10 0PE
UNITED KINGDOM

Tel: +44 (0) 1628 859500
Fax: +44 (0) 1628 859612
fast.info@eu.averydennison.com
www.fastener.averydennison.com

DESCRIPTION:	APPROVALS:
50MM PP SWIFTACH®	
	STOCK NO. 02160
	REV H

AVERY DENNISON

MARKETING SPECIFICATION DATASHEET

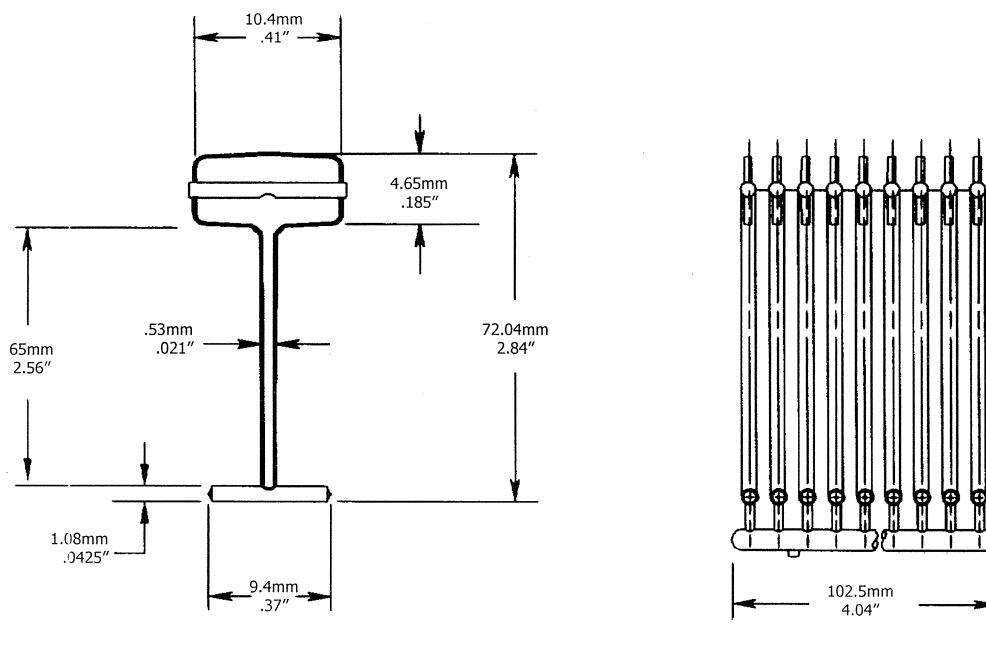

NOT TO SCALE

MIN. APPLIED TENSILE STRENGTH:	4.5 LBSF. / 2 KGF.
MATERIAL:	PP
WEIGHT:	.05 GRAMS / EACH
CLIP QUANTITY:	50
APPLICATION TOOL:	10651 MARK III PISTOL GRIP 08945 STANDARD SCISSOR GRIP MARK II HAND TOOL (CONTACT LOCAL SALES AGENT FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5,000/CTN - 50,000/CASE
T/F CONN PADDLES	YES



**AVERY
DENNISON™**


Fastener Division

AVERY DENNISON
FASTENER DIVISION
1 THOMAS ROAD
WOOBURN INDUSTRIAL PARK
WOOBURN GREEN
BUCKS. HP10 0PE
UNITED KINGDOM


Tel: +44 (0) 1628 859500
Fax: +44 (0) 1628 859612
fast.info@eu.averydennison.com
www.fastener.averydennison.com

DESCRIPTION:	APPROVALS:
65MM PP SWIFTACH®	
	STOCK NO. 02161
	REV H

AVERY DENNISON MARKETING SPECIFICATION

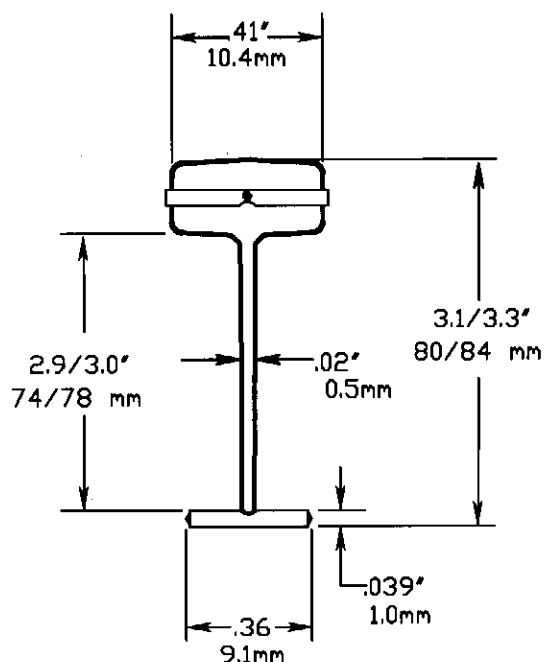

TOLERANCES IN. = $\pm .030$ IN.
MM = ± 0.7 mm

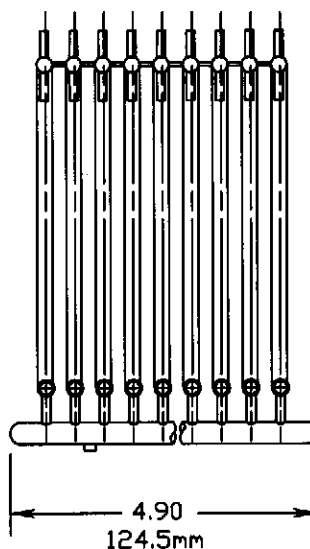

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	4.5 - 5.5 LBSF / 2.0 - 2.5 KGF
MATERIAL:	POLYPROPYLENE - NATURAL
WEIGHT:	0.048 GRAM
CLIP QUANTITY:	100
APPLICATION TOOL:	10651 MARK III HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	10,000/CTN, 100,000/CASE
T/F CONN PADDLES:	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

3" (76mm) SWIFTACH[®] PLUS

APPROVAL:

E. J. [Signature] 1-12-09

STOCK NO.

10659

REV

C