



**AVERY
DENNISON**

Fastener
Solutions

Super Heavy Duty Fasteners Marketing Specifications

For the following part numbers:


10575-0

10576-0

December 2025

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. =± .030 IN.
MM =± 0.7 mm

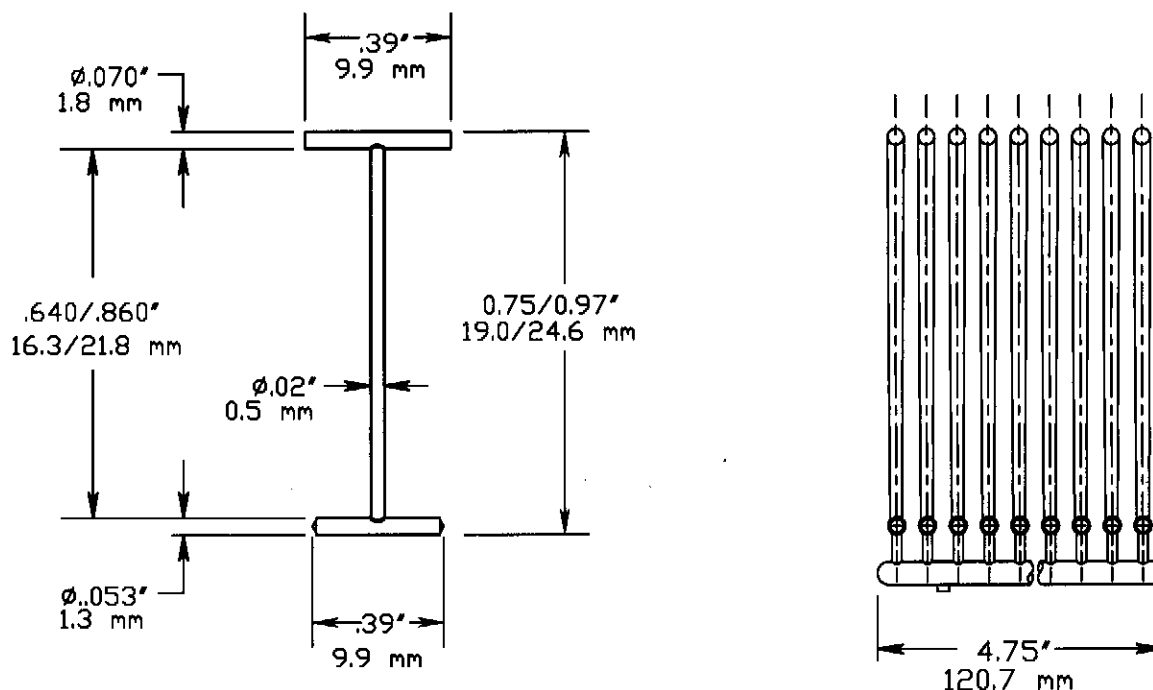

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	10/11 LBSF. / 4.5/5.0 KGF.
MATERIAL:	NYLON, TYPE 6 - NATURAL
WEIGHT/FASTENER:	.00190 oz. / .056 grams
CLIP QUANTITY:	50
APPLICATION TOOL:	10637 STANDARD PISTOL-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5,000/CTN., 50,000/CASE
T/F CONN. PADDLES	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 1-800-848-2169

DESCRIPTION:

3/4" (19mm) Swiftach® SHD T-End

APPROVAL:

[Signature] 1-30-09


STOCK NO.

10575

REV
F

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. =± .030 IN.
MM =± 0.7 mm

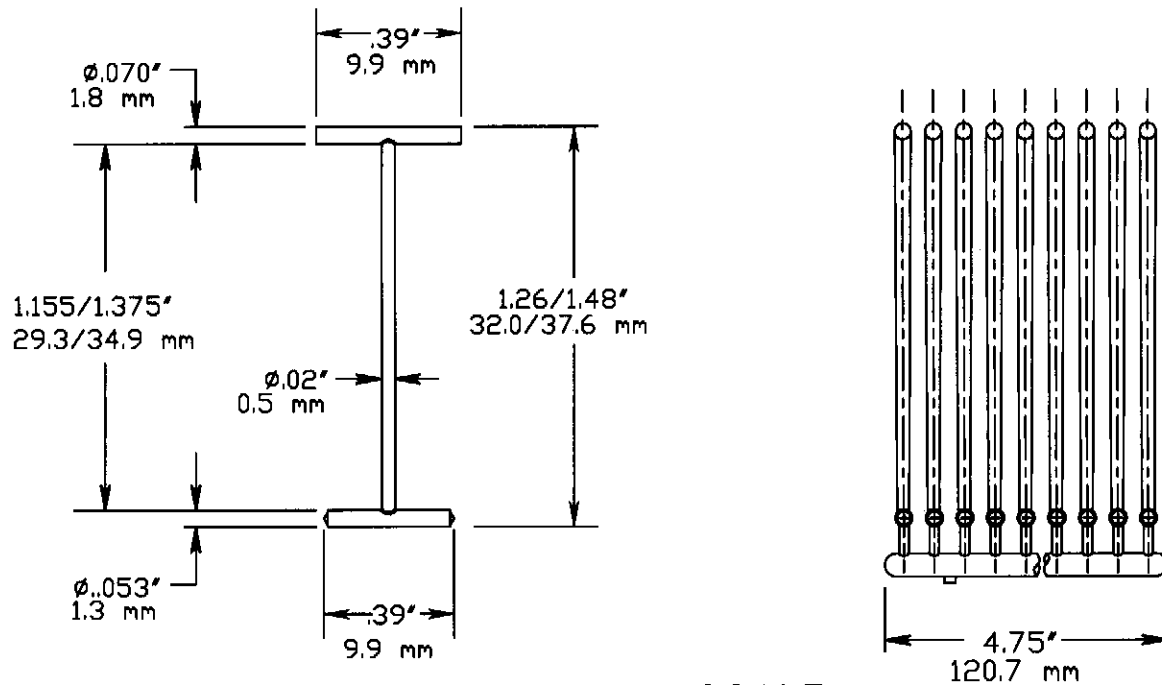

NOT TO SCALE

NOMINAL TENSILE STRENGTH:	10/11 LBSF. / 4.5/5.0 KGF.
MATERIAL:	NYLON: TYPE 6 - NATURAL
WEIGHT/FASTENER:	.00218 oz. / .064 grams
CLIP QUANTITY:	50
APPLICATION TOOL:	10637 STANDARD PISTOL-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5,000/CTN., 50,000/CASE
T/F CONN. PADDLES	YES



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 1-800-848-2169

DESCRIPTION:

1-1/4" (32mm) Swiftach® SHD T-End

APPROVAL:

[Signature] 1-30-09

STOCK NO.

10576

REV
H